


Pillow Blocks



UCP 200

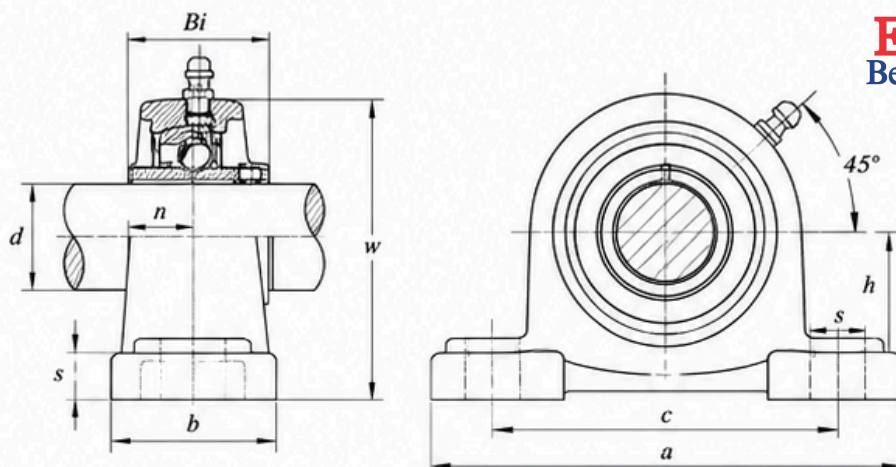

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)								Bolt Used (in.)	Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	h	a	e	b	s	g	w	Bi				
UCP 201 201-8	1/2	12	1 3/16 30.2	3 76	2 3/64 52	1 9/16 40	3/4 19	1/2 13	35/64 15	1.2205 31.0	M10 3/8	UCP 201 201-8	P 201	0.63
UCP 202 202-10	5/8	15	1 3/16 30.2	3 76	2 3/64 52	1 9/16 40	3/4 19	1/2 13	35/64 15	0.5000 12.7	M10 3/8	UCP 202 202-10	P 202	0.61
UCP 203 203-11	11/16	17	1 3/16 30.2	3 76	2 3/64 52	1 9/16 40	3/4 19	1/2 15	35/64 15	0.5000 12.7	M10 3/8	UCP 203 203-11	P 203	0.59
UCP 204 204	3/4	20	1 7/16 36.5	3 1/2 89	2 11/16 68	1 13/16 46	3/4 19	1/2 13	41/64 16	0.5000 12.7	M10 3/8	UCP 204 204	P 204	0.61
UCP 205-14 205-15 205 205-16	7/8 15/16 1	25	1 7/16 36.5	3 15/16 100	3 1/16 76	2 50	7/8 22	5/8 16	45/64 31	0.5630 14.3	M10 3/8	UCP 205-14 205-15 205 205-16	P 205	0.74
UCP 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	1 11/16 42.9	4 1/4 108	3 3/8 86	2 1/4 57	7/8 22	1/2 13	37/64 18	0.6260 15.9	M14 1/2	UCP 206-18 206 206-19 206-20	P 206	1.16
UCP 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 - 1 7/16	35	1 7/8 47.6	4 11/16 119	3 11/16 94	2 1/2 64	1 25	1/2 13	41/64 20	0.6890 17.5	M14 1/2	UCP 207-20 207-21 207-22 207 207-23	P 207	1.40
UCP 208-24 208-25 208	1 1/2 1 9/16 -	40	1 15/16 49.2	5 1/4 133	4 1/8 105	2 3/4 70	1 25	5/8 16	43/64 49	0.7480 19.0	M14 1/2	UCP 208-24 208-25 208	P 208	1.78
UCP 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4 -	45	2 1/8 54.2	5 3/4 146	4 1/2 114	3 76	1 25	1/2 13	49/64 25	0.7480 19.0	M14 1/2	UCP 209-26 209-27 209-28 209	P 209	2.00
UCP 210-30 210-31 210 210-32	1 7/8 1 15/16 - 2	50	2 1/4 55.5	6 1/4 159	4 7/8 124	3 1/4 83	1 1/8 29	1/2 13	59/32 51.6	0.7480 19.0	M16 5/8	UCP 210-30 210-31 210 210-32	P 210	2.55
UCP 211-32 211-34 211 211-35	2 2 1/8 - 2 3/16	55	2 1/2 63.5	6 7/8 175	5 1/2 140	3 1/2 89	1 1/8 29	1/2 13	2.1890 55.6	0.8740 22.2	M16 5/8	UCP 211-32 211-34 211 211-35	P 211	3.20
UCP 213-36 213	2 1/4	65	3 76.2	7 11/16 195	6 1/8 156	4 102	1 1/4 32	1/2 13	2.5630 65.1	1.0000 25.4	M20 3/4	UCP 213-40 213	P 213	5.11
UCP 214-44 214	2 3/4	70	3 1/8 79.4	8 1/4 210	6 1/2 165	4 3/8 111	1 1/4 32	1/2 13	2.9370 74.6	1.1890 30.2	M20 3/4	UCP 214-44 214	P 214	5.70
UCP 215 215-47 215-48	2 15/16 3	75	3 1/2 88.9	8 11/16 225	6 7/8 175	4 3/4 121	1 1/2 38	5/8 16	3.0630 30	1.3110 33.3	M20 3/4	UCP 215 215-47 215-48	P 215	6.10
UCP 217-52 217	3 1/4	85	4 101.6	9 13/16 250	7 11/16 196	5 1/2 140	1 3/4 44	7/8 22	2.3732 35	1.3425 34.1	M20 3/4	UCP 217-52 217	P 217	9.20
UCP 218-56 218	3 1/2	90	4 1/4 107.9	10 5/8 270	8 1/4 210	5 3/4 146	1 3/4 44	7/8 22	2.5795 40	1.6630 39.7	M22 7/8	UCP 218-56 218	P 218	11.40

Pillow Blocks


UCP 300

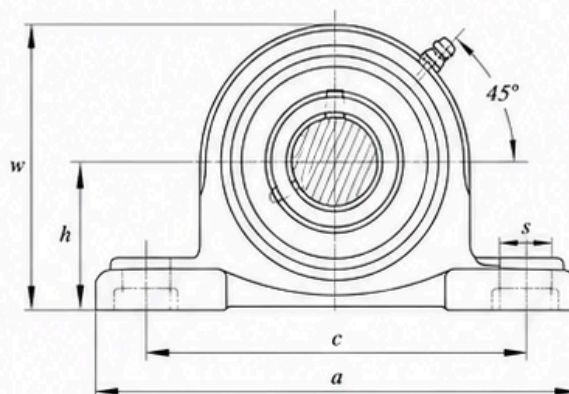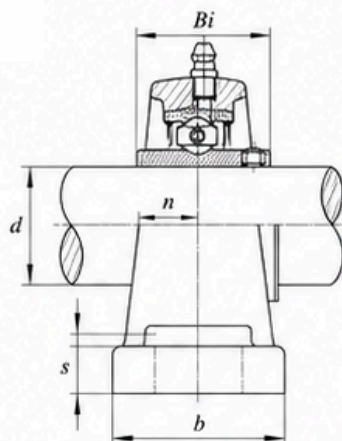

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)									Bolt Used (in.)	Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	h	a	c	b	s	s ₁	g	Bi	n				
UCP 305 305-14 305-16	7/8 1	25	1 49/64 45	6 7/8 175	5 3/16 132	1 3/4 45	25/32 20	21/32 17	5/8 16	3 11/32 85	0.5906 15	M14 1/2	UC 305 305-14 305-16	P 305	1.6
UCP 306 306-18 306-19	1 1/8 1 3/16	30	1 31/32 50	7 3/32 180	5 1/2 140	1 31/32 50	25/32 20	21/32 17	45/64 18	3 3/4 93	0.6923 17	M14 1/2	UC 306 306-18 306-19	P 306	2.1
UCP 307-20 307-22 307 307-23	1 1/4 1 3/8 1 7/16	35	2 13/64 56	8 9/32 203	6 5/16 160	2 7/32 56	1 25	21/32 17	25/32 20	4 11/64 48	0.7480 19	M14 1/2	UC 307-20 307-22 307 307-23	P 307	2.8
UCP 308-24 308	1 1/2	40	2 23/64 60	8 21/32 220	6 11/16 170	2 3/8 60	1 1/16 27	21/32 17	55/64 22	4.0472 52	0.7480 19	M14 1/2	UC 308-24 308	P 308	3.6
UCP 309-28 309	1 3/4	45	2 41/64 67	9 21/32 245	7 15/32 190	2 5/8 67	1 5/16 30	25/32 20	1 15/16 25	2.2441 57	0.8661 22	M16 5/8	UC 309-28 309	P 309	4.7
UCP 310-31 310	1 15/16 2	50	2 61/64 75	10 13/16 275	8 11/32 212	2 15/32 75	1 3/8 35	25/32 20	1 11/16 143	2.4015 61	0.8661 22	M16 5/8	UC 310-31 310	P 310	6.4
UCP 311-32 311	2	55	3 5/32 30.80	12 7/32 310	9 3/32 236	2 3/8 80	1 1/2 38	25/32 20	1 3/16 30	2.5984 66.6	0.9842 25	M16 5/8	UC 311-32 311	P 311	7.8
UCP 312-36 312	2 1/4	60	3 11/32 85	13 330	9 27/32 250	2 11/32 85	1 38	1 25	1 3/16 32	2.6795 165	1.0236 26	M20 3/4	UC 312-36 312	P 312	9.4
UCP 313-40 313	2 1/2	65	3 35/64 90	13 3/8 340	10 1/4 260	2 13/32 90	1 1/2 38	1 25	1 3/16 35	2.9370 176	1.1811 30	M20 3/4	UC 313-40 313	P 313	10.3
UCP 314-44 314	2 3/4	70	3 47/64 95	14 3/16 360	11 1/32 280	2 19/32 90	1 9/16 40	1 1/16 27	1 3/8 35	7.0992 78	1.2992 33	M22 7/8	UC 314-44 314	P 314	11.9
UCP 315 315-47 315-48	2 15/16 3	75	3 15/16 100	14 31/32 380	11 13/32 290	2 15/16 100	1 9/16 40	1 1/16 27	1 3/8 35	7 25/32 198	3.2598 32	M22 7/8	UC 315 315-47 315-48	P 315	14.5
UCP 316 316-50	3 1/8	80	4 11/64 106	15 3/4 400	11 13/16 300	3 9/16 110	1 9/16 40	1 1/16 27	1 9/16 40	8 17/64 206	3.3856 34	M22 7/8	UC 316 316-50	P 316	17.1
UCP 317 317-52	3 1/4	85	4 13/32 112	16 17/32 420	12 19/32 310	3 23/32 96	1 25/32 45	1 5/16 34	1 9/16 40	8 21/32 220	3.5748 40	M27 1	UC 317 317-52	P 317	19.2
UCP 318-56 318		90	4 41/64 118	16 15/16 430	13 330	4 11/32 110	1 25/32 45	1 5/16 34	1 49/64 45	9.7795 235	1.5748 40	M27 1 1/7	UC 318-56 318	P 318	21.1
UCP 320 320-64		95	4 59/64 125	18 1/2 470	14 3/16 360	4 23/32 120	1 31/32 50	1 13/32 33	1 49/64 52	4.0551 108	1.6142 41	M30 1 1/8	UC 319 320-64	P 319	28.2
UCP 322		110	5 29/32 150	20 2/32 530	15 3/4 400	5 1/2 140	2 5/32 55	1 9/16 40	1 31/32 60	4.6063 117	1.8110 46	M30 1 1/8	UC 322	P 322	34.8
UCP 324		120	6 19/64 160	22 7/16 570	17 23/32 450	5 1/2 140	2 5/32 55	1 9/16 40	1 31/32 60	12.9606 316	2.0079 51	M33 1 1/4	UC 324	P 324	53.0
UCP 326		130	7 3/32 180	23 5/8 600	18 29/32 480	5 1/2 140	2 5/32 55	1 9/16 40	1 31/32 60	13 11/32 335	2.1260 54	M33 1 1/4	UC 326	P 326	72.1
UCP 328		140	7 7/8 200	24 13/32 620	19 11/16 500	6 1/2 140	2 5/32 55	1 9/16 40	1 31/32 60	15.7806 393	2.3228 59	M33 1 1/4	UC 328	P 328	91.2

Pillow Blocks



UCP X00

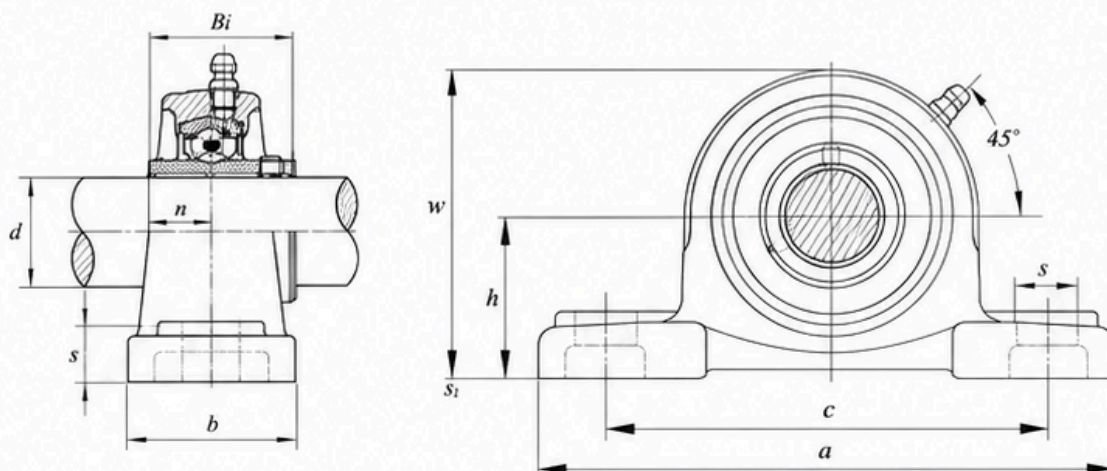

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)										Bolt Used (mm) (in.)	Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	h	a	e	b	s	s ₁	c	w	Bi	n				
UCP X05 X05-14 X05-16	7/8 15/16 1	25	1 3/4 44.4	6 1/4 159	4 11/16 119	2 51	1 25	21/32 17	45/64 18	1 15/16 85	0.6260 15.9	0.6260 15.9	M14 1/2	UCP X05 X05-14 X05-16	P X05	1.50
UCP X06 X06-18 X06-19 X06-20	1 1/8 1 3/16 1 1/4	30	1 7/8 47.6	6 7/8 175	5 127	2 1/4 57	1 25	21/32 17	25/32 20	3 5/64 92	1.6890 42.9	0.6890 17.5	M14 1/2	UCP X06 X06-18 X06-19 X06-20	P X06	2.00
UCP X07-20 X07-22 X07 X07-23	1 1/4 1 3/8 1 1 7/16	35	2 1/8 54.0	8 203	5 21/32 144	2 1/4 57	1 3/16 30	21/32 17	55/64 22	4 1/8 105	1.9370 49.2	0.7480 19.0	M14 1/2	UCP X07-20 X07-22 X07 X07-23	P X07	2.70
UCP X08-24 X08	1 1/2	40	2 5/16 58.7	8 3/4 222	5 23/32 156	2 5/8 67	1 1/4 32	23/32 20	1 3/32 26	4 25/32 113	1.9370 49.2	0.7480 19.0	M16 5/8	UCP X08-24 X08	P X08	3.50
UCP X09-26 X09-27 X09-28 X09	1 5/8 1 11/16 1 3/4 1	45	2 5/16 58.7	8 3/4 222	6 5/32 167	2 5/8 67	1 5/16 33	25/32 20	1 1/32 26	4 9/16 116	2.0315 51.6	0.7480 19.0	M16 5/8	UCP X09-26 X09-27 X09-28 X09	P X09	3.60
UCP X10-31 X10 X10-32	1 15/16 2	50	2 1/2 63.5	9 1/2 241	6 23/32 171	2 7/8 73	1 3/32 35	25/32 20	11/16 30	4 31/32 126	2.1890 55.6	0.8740 22.2	M16 5/8	UCP X10-31 X10 X10-32	P X10	4.40
UCP X11 X11-32 X11-35 X11-36	2 2 3/16 2 1/4	55	2 3/4 69.8	10 1/4 260	7 1/4 184	3 1/8 79	1 3/32 35	1 25	1 3/16 30	5 15/32 137	2.5630 65.1	1.0000 25.4	M20 3/4	UCP X11 X11-32 X11-35 X11-36	P X11	6.30
UCP X12 X12-36 X12-39	2 2 7/16	60	3 76.2	11 1/4 286	8 203	3 9/32 90	1 39/64 41	1 25	1 17/64 30	5 31/32 150	2.5630 65.1	1.0000 25.4	M20 3/4	UCP X12 X12-36 X12-39	P X12	7.90
UCP X13-40 X13	2 1/2	65	3 76.2	11 1/4 286	8 203	3 9/32 90	1 39/64 41	1 25	1 17/64 30	6 1/16 156	2.9370 74.6	1.1890 30.2	M20 3/4	UCP X13-40 X13	P X13	7.70
UCP X14-44 X14	2 3/4	70	3 1/2 79.4	13 330	9 1/32 230	3 1/2 89	1 1/4 32	1 1/16 27	1 3/8 35	6 23/32 171	3.0630 77.8	1.3110 33.3	M20 3/4	UCP X14-44 X14	P X14	10.60
UCP X15 X15-47 X15-48	2 15/16 3	75	3 1/2 88.9	13 330	9 1/32 230	3 1/2 89	1 1/4 32	1 1/16 27	1 5/8 41	6 7/8 175	3.2520 82.6	1.3110 33.3	M22 7/8	UCP X15 X15-47 X15-48	P X15	11.10
UCP X16 X16-50	3 1/8	80	4 101.6	15 380	11 5/32 282	4 1/32 103	1 3/16 30	1 31/32 48	1 11/16 43	7 1/16 180	3.3740 85.7	1.3425 34.1	M22 7/8	UCP X16 X16-50	P X16	16.20
UCP X17 X17-52	3 1/2	90	4 101.6	15 380	11 5/32 282	4 1/32 111	2 3/8 60	1 1/16 27	1 49/64 44	7 7/8 187	3.7795 96.0	1.5630 39.7	M22 7/8	UCP X17 X17-52	P X18	16.50
UCP X20 X20	4	100	5 127.0	17 432	13 9/32 337	4 3/4 121	2 33/64 64	1 5/16 33	2 5/64 52	9 21/32 245	4.6260 117.5	1.9370 49.2	M27 1	UCP X20 X20-64	P X20	31.80

Flange Units Square



UCF 200

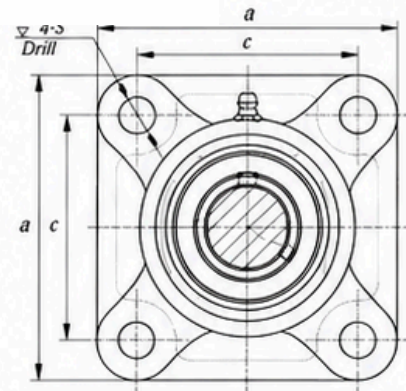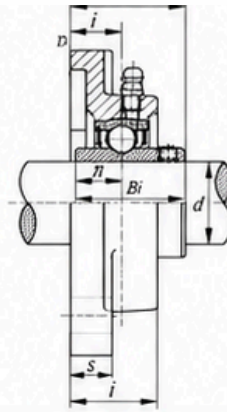

带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia.		外形尺寸 (英寸) 或 (毫米) Dimensions (in.) or (mm)									螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	d		a	c	i	g	l	s	z	Bi	n	(mm)	(in.)			
	(in.)	(mm)														
UCF 201 201-8	1/2	12	3 3/8 86	2 33/64 64	19/32 15	15/32 12	1 25.5	15/32 12	1 5/16 33.3	1.2205 31	0.5000 12.7	M10	3/8	UC 201 201-8	F 201	0.62
UCF 202 202-10	5/8	15	3 3/8 86	2 33/64 64	19/32 15	15/32 12	1 25.5	15/32 12	1 5/16 33.3	1.2205 31	0.5000 12.7	M10	3/8	UC 202 202-10	F 202	0.60
UCF 203 203-11	11/16	17	3 3/8 86	2 33/64 64	19/32 15	15/32 12	1 25.5	15/32 12	1 5/16 33.3	1.2205 31	0.5000 12.7	M10	3/8	UC 203 203-11	F 203	0.58
UCF 204-12 204	3/4	20	3 3/8 86	2 33/64 64	19/32 15	15/32 12	1 25.5	15/32 12	1 5/16 33.3	1.2205 31	0.5000 12.7	M10	3/8	UC 204-12 204	F 204	0.57
UCF 205-14 205-15 205-16	7/8 15/16 1	25	3 3/4 95	2 3/4 70	5/8 16	9/16 14	1 1/16 27	15/32 12	1 13/32 35.8	1.3425 14.1	0.5630 14.3	M10	3/8	UC 205-14 205-15 205-16	F 205	0.73
UCF 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	4 1/4 108	3 17/64 83	45/64 18	9/16 14	1 7/32 31	15/32 14	1 19/32 40.2	1.5000 38.1	0.6260 15.9	M10	3/16	UC 206-18 206 206-19 206-20	F 206	1.05
UCF 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 7/16	35	4 19/32 117	3 5/8 92	3/4 19	5/8 16	1 11/32 34	35/64 14	1 3/4 44.4	1.6890 42.9	0.6890 17.5	M14	7/2	UC 207-20 207-21 207-22 207 207-23	F 207	1.32
UCF 208-24 209-27 209-28 209	1 1/2 1 11/16 1 3/4	40	5 1/8 130	4 1/64 102	13/16 21	5/8 16	1 27/64 36	5/8 16	2 1/32 52.2	1.9370 49.2	0.7480 19.0	M14	1/2	UC 208-24 209-27 209-28 209	F 209	1.98
UCF 210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	5 5/8 143	4 3/8 111	55/64 22	23/32 18	1 9/16 40	5/8 16	2 5/32 54.6	2.0315 51.6	0.7480 19.0	M14	1/2	UC 210-30 210-31 210 210-32	F 210	2.27
UCF 211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	6 3/8 162	5 1/8 130	1 25	25/32 20	1 11/16 43	3/4 19	2 5/16 58.4	2.1890 55.6	0.8740 22.2	M16	5/8	UC 211-32 211-34 211 211-35	F 211	2.98
UCF 212-32 212 212-38 212-39	2 1/4 2 3/8 2 7/16	60	6 7/8 175	5 5/8 143	1 9/64 29	25/32 20	1 7/8 48	3/4 19	2 23/32 68.7	2.5630 65.1	1.0000 25.4	M16	5/8	UC 212-32 212 212-38 212-39	F 212	3.75
UCF 213-40 213	2 1/2	65	7 3/8 187	5 55/64 149	1 3/16 30	25/32 20	1 31/32 50	3/4 19	2 3/4 69.7	2.5630 65.1	1.0000 25.4	M16	5/8	UC 213-40 213	F 213	4.92
UCF 214-44 214	2 3/4	70	7 19/32 193	5 63/64 152	1 7/32 34	15/16 21	2 1/8 54	3/4 19	2 31/32 75.4	2.9370 74.6	1.1890 30.2	M16	5/8	UC 214-44 214	F 214	5.22
UCF 215 215-47 215-48	2 15/16 3	75	7 7/8 200	6 17/64 159	1 11/32 34	15/16 21	2 7/32 56	3/4 19	3 3/22 78.5	3.0630 77.8	1.3110 33.3	M16	5/8	UC 215 215-47 215-48	F 215	5.70
UCF 216 216-50	3 1/8	80	8 3/16 208	6 1/2 165	1 11/32 34	15/16 21	2 7/32 56	3/7 19	3 32 78	3.2520 82.6	1.3110 33.3	M20	3/4	UC 216 216-50	F 216	6.7
UCF 217-52 217	3 1/4	85	8 21/32 220	6 57/64 175	1 27/64 36	1 1/32 26	2 15/32 63	29/32 23	3 7/16 87.6	3.3740 85.7	1.3425 34.1	M20	3/4	UC 217-52 217	F 217	8.4
UCF 218-56 218	3 1/2	90	9 1/4 235	7 23/64 187	1 37/64 40	1 1/32 26	2 11/16 68	29/32 23	3 25/32 96.3	3.7795 96.0	1.5630 39.7	M20	3/4	UC 218-56 218	F 218	9.7

Flange Units (Square)



UCF 300

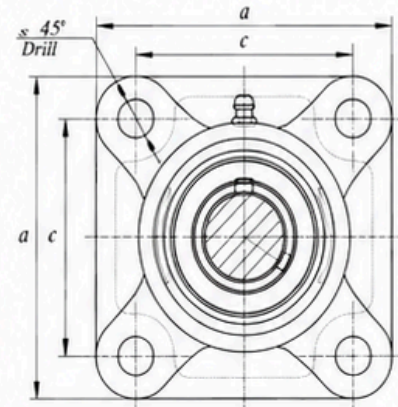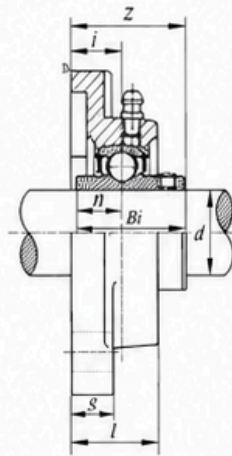

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)									Bolt Used		Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	a	c	i	g	l	s	z	Bi	n	(mm)	(in.)			
UCF 305 305-16	1	25	4 11/32 110	3 5/32 80	5/8 16	13	1 5/32 29	5/8 16	1 17/32 39	1.4961 38	0.5906 15	M14	1/2	UC 305 305-16	F 305	1.20
UCF 306-18 306 306-19	1 1/8 1 3/16	30	4 29/32 125	3 47/64 95	45/64 18	19/32 15	1 1/4 32	5/8 16	1 23/32 44	1.6929 43	0.6693 17	M14	1/2	UC 306-18 306 306-19	F 306	1.8
UCF 307-20 307-22 307 307-23	1 1/4 1 3/8 1 7/16	35	5 5/16 135	3 15/16 100	25/32 20	5/8 16	1 13/32 36	3/4 19	1 15/16 49	1.8897 48	0.7480 19	M16	5/8	UC 307-20 307-22 307 307-23	F 307	2.20
UCF 308-24 308	1 1/2	40	5 29/32 150	4 13/32 112	29/32 23	21/32 17	1 9/16 40	3/4 19	2 7/32 56	2.0472 52	0.7480 19	M16	5/8	UC 308-24 308	F 308	3.0
UCF 309-28 309	1 3/4	45	6 5/16 160	4 59/64 125	63/64 25	23/32 18	1 23/32 44	3/4 19	2 3/8 60	2.4411 57	0.8661 22	M16	5/8	UC 309-28 309	F 309	3.8
UCF 310-31 310 310-32	1 15/16 2	50	6 7/8 175	5 13/64 132	1 7/64 28	3/4 19	1 7/8 48	29/32 23	2 5/8 67	2.7015 61	0.8661 22	M20	3/4	UC 310-31 310 310-32	F 310	4.9
UCF 311-32 311	2	55	7 9/32 185	5 13/64 140	1 3/16 30	25/32 20	2 1/16 52	29/32 23	2 25/32 71	2.5984 66	0.9842 25	M20	3/4	UC 311-32 311	F 311	5.6
UCF 312 312-36	2 1/4	60	7 11/16 195	5 9/32 150	1 19/64 33	7/8 22	2 7/32 56	29/32 23	3 1/16 78	2.9533 71	1.0236 26	M20	3/4	UC 312 312-36	F 312	6.8
UCF 313-40 313	2 1/2	65	8 3/16 208	6 17/32 166	1 19/64 33	7/8 22	2 9/32 58	29/32 23	3 1/16 78	2.9528 75	1.1811 30	M20	3/4	UC 313-40 313	F 313	7.8
UCF 314-44 314	3/4	70	8 29/32 226	7 1/16 178	1 27/64 36	1 25	2 13/32 61	63/64 25	3 3/16 81	3.0709 78	1.2990 33	M22	7/8	UC 314-44 314	F 314	9.8
UCF 315 315-47 315-48	2 15/16 3	75	9 9/32 236	7 1/4 184	1 17/32 39	1 25	2 19/32 66	63/64 25	3 1/2 89	3.3238 82	1.2598 32	M22	7/8	UC 315 315-47 315-48	F 315	11.6
UCF 316 316-50	3 1/8	80	9 27/32 250	7 23/32 196	1 17/32 39	1 1/16 27	2 11/16 68	1 7/32 31	19/32 91	3.3858 86	1.3386 34	M27	1	UC 316 316-50	F 316	13.2
UCF 317		85	10 1/4 280	8 1/32 204	1 47/64 44	1 1/16 27	2 29/32 72	1 7/32 31	3 15/16 100	3.7795 96	1.5748 40	M27	1	UC 317	F 317	15.2
UCF 318-56 318	3 1/2	90	11 1/32 280	8 1/32 216	1 47/64 44	1 3/16 30	3 76	1 3/8 35	3 15/16 100	3.7795 96	1.5748 40	M30	1 1/8	UC 318-56 318	F 318	18.8
UCF 319	3 3/4	95	11 13/32 290	8 31/32 226	2 21/64 57	1 3/16 30	3 11/16 94	1 3/8 35	4 3/4 121	4.0551 103	1.6142 41	M30	1 1/8	UC 319	F 319	21.1
UCF 320 320-64	4	100	12 7/32 310	9 17/32 234	2 21/64 57	1 1/4 32	3 11/16 94	1 1/2 38	4 29/32 125	4.2519 108	1.6535 42	M33	1 1/4	UC 320 320-64	F 321	25.3
UCF 322		110	13 3/8 340	10 15/32 266	2 23/64 60	13/8 35	3 25/32 96	1 39/64 41	55/32 131	4.6663 117	1.8110 46	M36	1 3/8	UC 322	F 322	35.0
UCF 324		120	14 9/16 370	11 27/64 290	2 9/16 65	19/16 40	4 11/32 110	1 39/64 41	51/2 140	4.9606 126	2.0079 51	M36	1 3/8	UC 324	F 324	47.2
UCF 326		130	16 5/32 410	12 19/32 320	2 9/16 65	125/32 45	4 17/32 115	1 39/64 41	53/4 146	5.3150 135	2.1260 54	M36	1 3/8	UC 326	F 326	64.1
UCF 328		140	17 23/32 450	13 25/32 350	2 61/64 75	25/32 55	4 29/32 125	1 39/64 41	61/32 161	5.7086 145	2.3228 59	M36	1 3/8	UC 328	F 328	90.2

Flange Units (Sqaure)



UCF X00

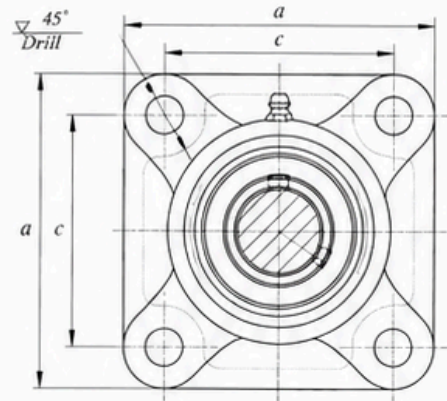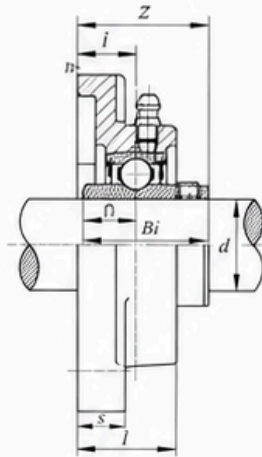

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)										Bolt Used		Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	a	e	i	g	l	s	z	Bi	n	(mm)	(in.)				
UCF X05 X05-16	1	25	4 1/4 108	3 17/64 83	45/64 18	1/2 13	1 3/16 30	15/32 12	1 19/32 40.2	1.5000 38.1	0.6260 15.9	M10	3/8	UC X05 X05-16	F X05	1.1	
UCF X06 X06-19 X06-20	1 3/16 1 1/4	30	4 19/32 117	3 5/8 92	3/4 19	9/16 14	1 11/32 34	5/8 16	1 3/4 44.4	1.6890 42.9	0.6890 17.5	M14	1/2	UC X06 X06-19 X06-20	F X06	1.4	
UCF X07-20 X07-22 X07 X07-23	1 1/4 1 3/8 1 7/16	35	5 1/8 130	4 1/64 102	53/64 21	9/16 14	1 1/2 38	5/8 16	2 1/32 51.2	1.9370 49.2	0.7480 19.0	M14	1/2	UC X07-20 X07-22 X07 X07-23	F X07	1.9	
UCF X08-24 X08	1 1/2	40	13/32 137	4 9/64 105	55/64 22	9/16 14	1 9/16 40	3/4 19	2 1/16 52.2	1.9370 49.2	0.7480 19.0	M16	5/8	UC X08-24 X08	F X08	2.1	
UCF X09-26 X09-27 X09-28 X09	1 5/8 1 11/16 1 3/4	45	5 5/8 143	4 3/8 111	29/32 23	9/16 14	1 9/16 40	3/4 19	2 3/16 55.6	2.0315 51.6	0.7480 19.0	M16	5/8	UC X09-26 X09-27 X09-28 X09	F X09	2.5	
UCF X11 X11-34 X11-35 X11-36	1 7/8 2 3/16 2 1/4	55	6 3/8 175	5 1/8 143	1 1/32 29	25/32 20	1 23/32 49	3/4 19	2 23/32 68.7	2.5630 65.1	1.0000 25.4	M16	5/8	UC X10-30 X10-31 X10 X10-32	F X10	3.6	
UCF X12-36 X12 X12-38 X12-39	2 1/4 2 3/8 2 7/16	60	7 3/8 187	5 55/64 149	1 11/32 34	13/16 21	2 5/16 59	3/4 19	2 29/32 73.7	2.5630 65.1	1.0000 25.4	M16	5/8	UC X12-36 X12 X12-38 X12-39	F X12	5.5	
UCF X13-40 X13	2 1/2	65	7 3/8 187	5 55/64 149	1 11/32 34	13/16 21	2 5/16 59	3/4 19	3 3/32 78.4	2.9370 74.6	1.1890 30.2	M16	5/8	UC X13-40 X13	F X13	5.9	
UCF X14-44 X14	2 3/4	70	7 3/4 197	5 63/64 152	1 29/64 36	15/16 24	2 3/8 60	29/32 23	3 7/32 81.5	3.0630 77.8	1.3110 33.3	M20	3/4	UC X14-44 X14	F X14	7.3	
UCF X15 X15-47 X15-48	2 15/16 3	75	7 3/4 197	5 63/64 152	1 37/64 40	15/16 24	2 11/16 68	29/32 23	3 17/32 89.3	3.2520 82.6	1.3110 33.3	M20	3/4	UC X15 X15-47 X15-48	F X15	8.0	
UCF X16 X16-50	3 1/8	80	8 7/16 214	6 47/64 171	1 37/64 40	15/16 24	2 3/4 70	29/32 23	3 19/32 91.6	3.3740 85.7	1.3425 34.1	M20	3/4	UC X16 X16-50	F X16	9.8	
UCF X17 X17-52	3 1/4	85	8 7/16 214	6 47/64 171	1 37/64 40	15/16 24	2 3/4 70	29/32 23	3 25/32 96.3	3.7795 96.0	1.5630 39.7	M20	3/4	UC X17 X17-52	F X17	10.5	
UCF X18-56 X18	3 1/2	90	8 7/16 214	6 47/64 171	1 49/64 42	15/16 24	3 76	29/32 23	4 3/16 106.1	4.0945 104.0	1.6890 42.9	M20	3/4	UC X18-56 X18	F X18	11.2	
UCF X20 X20-64	4 4	100	10 9/16 268	8 5/16 211	2 21/64 59	1 7/32 31	3 97	13/16 31	5 3/250 127.3	4.6260 117.5	1.9370 49.2	M27	3/4	UC X20 X20-64	F X20	18.1	

Flange Cartige Units


UCFC 200

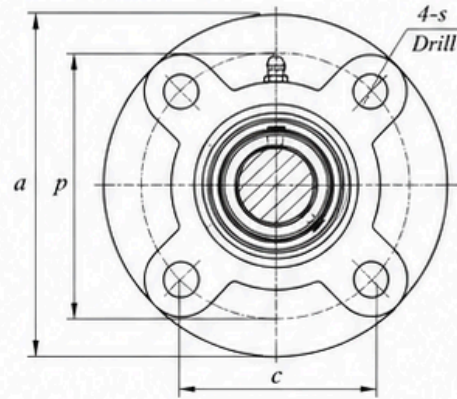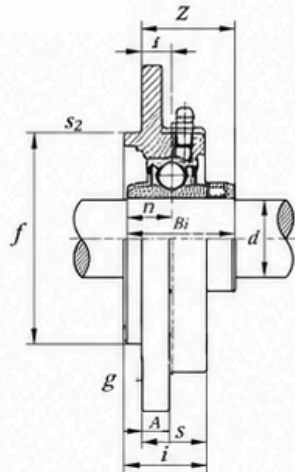

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)											Bolt Used (in.)	Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	a	p	e	i	l	j	k	g	f	z	n				
UCFC 201 201-8	1/2	12	3 15/16 100	3 5/64 80	2 11/16 68	25/64 10	1 25.5	15/32 12	13/64 6	13/16 20.5	2.409 61.2	1 1/8 28.3	1.2205 31.0	M10 3/8	UC 201 201-8	FC 201	0.72
UCFC 202 202-10	5/8	15	3 15/16 100	3 5/64 80	2 11/16 68	25/64 10	1 25.5	15/32 12	13/64 6	9/32 7	2.409 61.2	1 1/8 28.3	1.2206 12.7	M10 3/8	UC 202 202-10	FC 202	0.70
UCFC 203 203-11	11/16	17	3 15/16 100	3 5/64 80	2 11/16 68	25/64 10	1 25.5	15/32 12	13/64 6	9/32 7	2.409 61.2	1 1/8 28.3	1.2205 31.0	M10 3/8	UC 203 203-11	FC 203	0.68
UCFC 204-12 204	3/4	20	3 15/16 100	3 5/64 80	2 11/16 68	25/64 10	1 25.5	15/32 12	13/64 6	9/32 7	2.409 20.5	1 1/8 28.3	1.2206 12.7	M10 3/8	UC 204-12 204	FC 204	0.67
UCFC 205-14 205 205-16	7/8 15/16 1	25	4 17/32 115	3 35/64 90	2 1/2 63.6	25/64 10	1 1/16 27	15/32 12	9/32 6	53/64 3	2.7559 70.1	1 5/32 39.7	1.3425 34.3	M10 3/8	UC 205-14 205 205-16	FC 205	0.95
UCFC 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	4 29/32 125	3 15/16 100	2 5/8 70.7	25/64 10	1 7/32 31	15/32 12	5/16 8	5/16 3	3.1486 80.9	1 9/32 32.2	1.5000 38.5	M10 3/8	UC 206-18 206 206-19 206-20	FC 206	1.22
UCFC 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 1 7/16	35	5 5/16 135	4 21/64 110	3 1/16 77.8	7/16 11	1 11/32 34	35/64 14	5/16 9	11/32 26	3.8433 98.1	1 7/16 42.2	1.6890 42.5	M12 7/16	UC 207-20 207-21 207-22 207 207-23	FC 207	1.58
UCFC 208-24 208-25 208-26 212-39	1 1/2 1 9/16 1 5/8 1 9/16	40	5 23/32 145	4 23/32 120	3 11/32 84.8	7/16 11	1 13/32 36	35/64 14	5/16 8	11/32 36	3.9370 100	1 5/8 49.7	0.6970 49.2	M12 7/16	UC 207-20 203-21 207-23 207-25	FC 207	1.38
UCFC 208-24 208	1 9/16	45	6 5/16 160	5 13/64 132	3 43/64 93.3	7/16 11	1 7/8 39	15/32 12	9/16 14	11/32 26	4.1339 105	1 9/32 40.2	2.5630 45.1	M12 3/16	UC 208-26 208	FC 213	2.5
UCFC 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	8 5/16 166	6 11/16 170	4 43/64 120	45/64 16	2 1/8 54	35/64 16	9/16 15	27/64 36	5.3150 135	2 9/32 56.2	1.0000 25.4	M14 1/2	UC 209-26 209-27 209-28 209	FC 209	2.50
UCFC 213-30 210-31	1 7/8 1 15/14	65	6 1/2 165	5 7/16 138	3 27/32 97.6	25/64 16	1 31/32 50	3/4 19	35/64 15	19/34 36	5.7087 145	2 3/16 56.7	2.5630 65.1	M16 5/8	UC 213-40 213	FC 213	5.20
UCFC 214-44 212-32 212-39 214	2 2 1/8 2 7/16	55	7 9/32 185	5 29/32 150	4 1/4 116	45/64 17	2 7/32 48	3/4 19	55/32 16	37/64 18	6.2992 160	1 15/32 74.6	3.0530 30.2	M16 5/8	UC 214-44 212-38 212-39 214	FC 214	6.30
UCFC 215 215-47 215-48	3 2 15/16	75	9 21/32 245	7 1/4 184	5 1/8 130.1	45/64 18	2 7/32 56	3/8 19	23/32 18	37/64 18	6.2902 62.5	3.0630 77.8	1.3110 33.3	M16 5/8	UC 215 215-47 215-48	FC 215	6.90
UCFC 216 216-50	3 1/8	80	9 7/16 240	7 7/8 200	5 9/16 141.4	45/64 18	2 9/32 58	3/4 19	23/32 16	21/32 18	6.6919 170	2 7/32 82.6	1.3110 33.3	M20 3/4	UC 216 216-50	FC 216	8.90
UCFC 217-52 217	3 1/4	85	10 13/32 250	8 1/4 208	6 1/16 154.1	45/64 18	2 15/32 63	25/32 20	45/64 20	25/32 19	7.0866 180	2 3/4 69.7	3.3425 34.1	M20 3/4	UC 217-52 217	FC 217	10.40
UCFC 218-56 218	3 1/2	90	10 7/16 265	8 21/32 220	6 1/8 155.5	55/64 22	2 11/16 68	39/64 25	25/64 20	31/32 20	7.4803 190	3 3/32 96.0	3.7795 39.7	M20 3/4	UC 218-56 218	FC 218	13.00

Flange Units (Oval)


UCFL 200

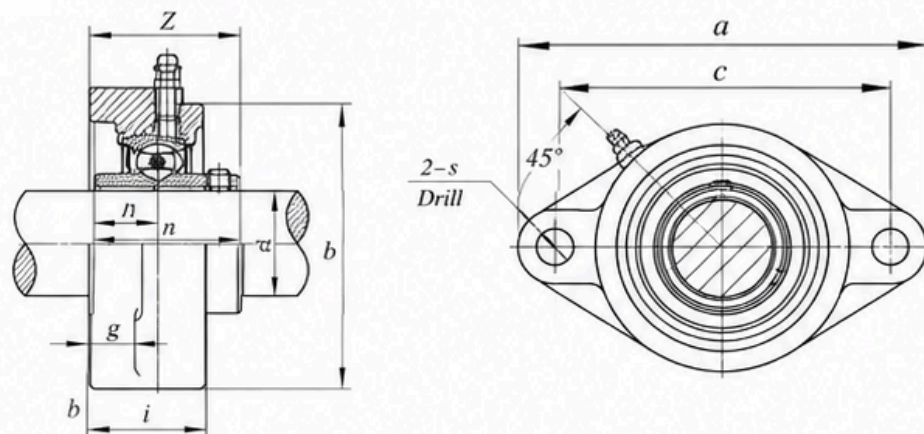

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)										Bolt Used		Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	a	e	i	g	l	z	s	Bi	n	(mm)	(in.)				
UCFL 201 201-8	1/2	12	4 7/16 113	3 5/8 92	19/32 15	7/16 11	1 11/16 43	25/64 10	7/16 11	5/16 8	0.5200 31.0	M10	3/8	UC 201 201-8	FL 201	0.45	
UCFL 202 202-10	5/8	15	4 7/16 113	3 5/8 92	19/32 15	7/16 11	1 11/16 43	25/64 10	7/16 11	5/16 8	0.5000 31.0	M10	3/8	UC 202 202-10	FL 202	0.43	
UCFL 203 203-11	11/16	17	4 7/16 113	3 5/8 92	19/32 15	7/16 11	1 11/16 43	25/64 10	7/16 11	5/16 8	1.2205 31.0	M10	3/8	UC 203 203-11	FL 203	0.41	
UCFL 204-12 204	3/4	20	4 7/16 113	3 5/8 92	19/32 15	7/16 11	1 11/16 43	25/64 10	7/16 11	5/16 8	1.2200 31.0	M10	3/8	UC 204-12 204	FL 204	0.41	
UCFL 205-14 205-15 205 205-16	7/8 15/16 1	25	5 1/4 133	4 1/4 108	21/32 17	1/2 13	1 13/16 46	25/64 10	5/8 16	3/8 10	1.3386 34.3	M10	3/8	UC 205-14 205-15 205 205-16	FL 205	0.56	
UCFL 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	6 11/32 161	5 1/8 130	31/32 25	3/4 16	1 7/8 48	15/32 12	3/4 19	1/2 13	1.5000 38.1	M14	1/2	UC 206-18 206 206-19 206-20	FL 206	0.84	
UCFL 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	6 11/32 161	5 1/8 130	31/32 25	3/4 16	1 7/8 48	15/32 12	3/4 19	1/2 13	1.6890 42.9	M14	1/2	UC 207-20 207-21 207-22 207 207-23	FL 207	1.05	
UCFL 208-24 208-25 208	1 1/2 1 11/16	40	7 3/4 197	6 1/4 159	63/64 25	7/8 18	2 51	15/32 12	1 25	5/8 16	1.9370 19.0	M14	1/2	UC 208-24 208-25 208	FL 208	1.40	
UCFL 209-26 209-27 209-28 209	1 5/8 1 11/16 1 1 3/4	45	8 13/16 224	7 1/4 184	63/64 25	7/8 18	2 9/32 53	25/32 20	1 35	5/8 16	1.9370 49.2	M16	5/8	UC 209-26 209-27 209-28 209	FL 209	1.72	
UCFL 210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	9 27/32 250	7 7/8 200	11/32 26	1 19	2 9/32 58	25/32 20	1 1/8 29	11/16 17	2.0315 51.6	M16	5/8	UC 210-30 210-31 210 210-32	FL 210	1.93	
UCFL 211-32 211-34 211-34 212-39	1 7/8 2 2 1/8 2 3/16	55	10 5/8 290	8 1/2 216	117/32 31	1 1/8 22	2 9/16 65	25/32 20	1 1/4 32	11/16 17	2.1890 55.6	M20	5/8	UC 211-32 212 212-38 212-39	FL 211	3.80	
UCFL 212-36 213	2 1/2	65	12 19/32 320	10 1/4 260	1 1/2 38	1 1/4 25	2 3/4 70	1 25	1 3/8 35	11/16 17	2.5630 65.4	M20	3/4	UC 213-40 213	FL 213	4.30	
UCFL 214-44 214	2 3/4	70	13 3/16 335	10 5/8 270	17/32 31	1 1/4 25	2 15/16 75	1 25	1 3/8 35	11/16 17	2.9370 74.6	M20	3/4	UC 214-44 214	FL 214	5.10	
UCFL 215 215-47 215-48	2 15/16 3	75	14 31/32 380	11 13/16 300	17/32 31	1 1/4 25	3 1/8 79	1 1/16 27	1 3/8 35	11/16 17	3.0630 77.8	M20	3/4	UC 215 215-47 215-48	FL 215	5.60	
UCFL 216 216-50	3 1/8	80	15 3/4 400	12 1/2 320	131/32 34	1 3/8 25	3 5/16 84	1 1/16 27	1 1/2 38	11/16 17	3.3858 86.0	M20	3/4	UC 216 216-50	FL 216	7.20	
UCFL 217-52 217	3 1/4	85	17 3/32 435	13 3/8 340	2 3/32 36	1 1/2 27	3 13/32 86	1 5/16 33	1 5/8 40	7/8 22	3.7795 96.0	M20	3/4	UC 217-52 217	FL 217	9.70	
UCFL 218-56 218	3 1/2	90	18 15/32 465	14 3/8 365	2 3/32 36	1 1/2 27	4 1/8 105	1 5/16 33	1 5/8 40	7/8 22	3.7795 96.0	M27	1	UC 218-56 218	FL 218	11.10	

Flange Units (Oval)


UCFL 300

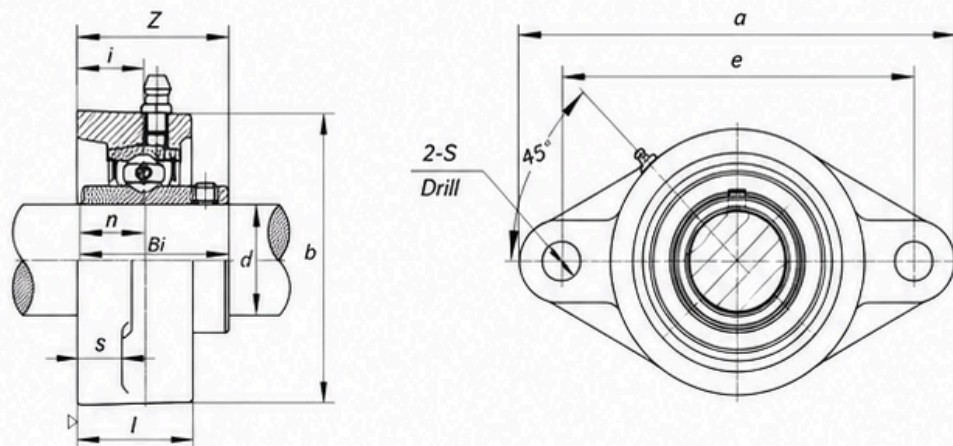

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)									Bolt Used		Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	a	e	i	g	l	s	z	Bi	n	(mm)	(in.)			
UCFL 305 305-16	1	25	5 29/32 150	2 29/64 113	5/8 16	1/2 13	1 5/32 29	3/4 19	3 5/32 80	1.4961 38	0.5906 15	M16	5/8	UCF 305 305-16	FL 305	1.1
UCFL 306-18 306-20	1 1/18 1 1/4	30	7 3/32 180	5 9/32 134	45/64 18	19/32 15	1 1/4 32	29/32 23	3 17/32 90	1 28/32 41	0.6693 17	M20	3/4	UCF 306-18 306-20	FL 306	1.5
UCFL 307-20 307-22 307 307-23	1 1/4 1 3/8 1 7/16	35	7 9/32 185	5 35/64 141	25/32 20	5/8 16	1 13/32 36	29/32 23	3 15/16 100	1.8897 49	0.7480 19	M20	3/4	UCF 307-20 307-22 307 307-23	FL 307	1.8
UCFL 308-24 308	1 1/2	40	7 7/8 200	6 7/32 158	29/32 23	21/32 17	1 9/16 40	29/32 23	4 13/32 111	2.0472 52	0.7480 19	M20	3/4	UCF 308-24 308	FL 308	2.4
UCFL 309-28 309	1 3/4	45	9 1/16 230	6 31/32 175	63/64 25	23/32 18	1 23/32 44	63/64 25	4 23/8 125	2.4411 57	0.8661 22	M22	7/8	UCF 309-28 309	FL 309	3.4
UCFL 310-31 310 310-32	1 15/16 2	50	9 7/16 240	7 23/64 187	1 7/64 28	3/4 19	1 7/8 48	63/64 25	5 1/2 67	2.4015 61	0.8661 22	M22	7/8	UCF 310-31 310 310-32	FL 310	4.3
UCFL 311-32 311	2	55	9 27/32 250	7 51/64 198	1 3/16 30	25/32 20	2 1/16 52	63/64 25	2 25/32 71	2.5984 66	0.9842 25	M22	7/8	UCF 311-32 311	FL 311	5.2
UCFL 312-36 312		60	10 5/8 270	8 11/32 212	1 19/64 33	27/32 22	2 7/32 56	1 7/32 31	5 15/16 160	3 5/16 79	1.0236 26	M27	1	UCF 312-36 312	FL 312	6.3
UCFL 313-40 313	2 1/2	65	11 5/8 295	9 29/64 240	1 19/64 33	1 25	2 9/32 58	1 7/32 31	6 7/8 175	2.9538 75	1.1811 30	M27	1	UCF 313-40 313	FL 313	7.9
UCFL 314-44 314	2 3/4	70	12 13/32 315	9 27/32 250	1 27/64 36	1 3/32 28	2 13/32 59	1 3/8 35	7 9/32 81	3 3/16 78	1.2992 33	M30	1 1/8	UCF 314-44 314	FL 314	9.3
UCFL 315 315-48	3	75	12 19/32 320	10 15/64 260	1 17/32 39	1 3/16 30	2 19/32 66	1 3/8 35	7 11/16 195	3 1/2 82	1.2598 32	M30	1 1/8	UCF 315 315-48	FL 315	10.6
UCFL 316 316-50	3 1/8	80	13 31/32 355	11 7/32 285	1 1/2 38	1 1/4 32	2 11/16 68	1 1/2 38	8 9/32 210	3.3858 96	1.3386 34	M33	1 1/4	UCF 316 316-50	FL 316	13.5
UCFL 317 317-52	3 1/4	85	14 9/16 370	11 13/16 300	1 47/64 44	1 1/4 32	2 29/32 74	1 1/2 38	8 21/32 220	3 15/16 96	1.5748 40	M33	1 1/4	UCF 317 317-52	FL 317	15.2
UCFL 318-56 318	3 1/2	90	15 5/32 385	12 13/32 315	1 47/64 44	1 13/32 34	3 76	1 1/2 38	9 1/4 235	3 15/16 100	1.5748 40	M33	1 1/7	UCF 318-56 318	FL 318	18.0
UCFL 319		95	15 15/16 405	13 330	2 21/64 50	1 9/16 40	3 11/16 94	1 39/64 40	9 27/32 250	4 3/4 123	1.6142 41	M36	1 3/8	UCF 319	FL 319	22.7
UCFL 320 320-64	4	100	17 5/16 440	14 11/64 360	2 21/64 50	1 9/16 40	3 11/16 94	1 47/64 40	10 5/8 270	4 29/32 108	1.6535 42	M39	1 1/2	UCF 320 320-64	FL 320	27.2
UCFL 322		110	18 1/2 470	15 23/64 390	2 23/64 60	2 21/32 56	3 25/32 96	1 47/64 40	11 13/16 300	5.6063 131	1.8110 46	M39	1 1/2	UCF 322	FL 322	34.2
UCFL 324		120	20 15/32 520	16 59/64 430	2 9/16 65	1 7/8 48	4 11/32 110	2 27/32 47	13 330	5 1/2 140	4.0079 51	M42	1 5/8	UCF 324	FL 324	48.1
UCFL 326		130	21 21/32 550	18 7/64 460	2 9/16 65	1 31/32 50	4 17/32 115	2 27/32 47	13 3/16 360	5 3/4 146	2.1260 54	M42	1 5/8	UCF 326	FL 326	59.5
UCFL 328		140	23 5/8 600	19 11/16 500	2 61/64 75	2 3/8 60	4 29/32 125	2 51	15 3/4 400	6 11/32 161	2.3228 59	M45	1 3/4	UCF 328	FL 328	73.5

Flange Units (Oval)

UCFL X00


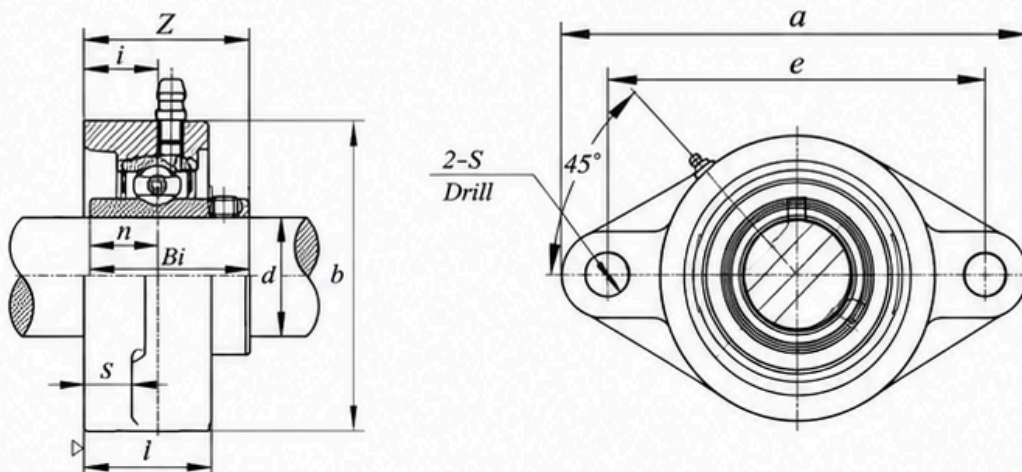


Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)									Bolt Used		Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	a	e	i	g	l	s	z	Bi	n	(mm)	(in.)			
UCFL X05		25	5 9/16	4 39/64	45/64	1/2	1 3/16	15/32	3 9/32	1 19/32	0.6260			UCF X05		
X05-14	7/8		141	117	18	13	30	12	83	40.2	15.9	M10	3/8	UCF X05-14	FL X05	1.0
X05-16	1													UCF X05-16		
UCFL X06		30	6 5/32	5 1/8	3/4	9/16	1 11/32	5/8	3 3/4	1 3/4	0.6890			UCF X06		
X06-18	1 1/16		155	130	19	14	34	16	95	44.4	17.5	M14	1/2	UCF X06-18	FL X06	1.4
X06-19	1 3/16													UCF X06-19		
X06-20	1 1/4													UCF X06-20		
UCFL X07-20	1 1/4	35	6 23/32	5 43/64	53/64	9/16	1 1/2	5/8	4 1/8	2 1/32	0.7480			UCF X07-20		
X07-22	1 3/8		171	144	21	14	38	16	105	51.2	19.0	M14	1/2	UCF X07-22	FL X07	1.9
X07														UCF X07		
X07-23	1 7/16													UCF X07-23		
UCFL X08-24	1 1/2	40	7 1/16	5 53/64	55/64	9/16	1 9/16	5/8	4 3/8	2 1/16	0.7480			UCF X08-24		
X08			179	148	22	14	40	16	111	52.2	19.0	M14	1/2	UCF X08	FL X08	2.0
UCFL X09-26	1 5/8	45	7 7/16	6 3/16	29/32	9/16	1 9/16	5/8	4 9/16	2 3/16	0.7480			UCF X09-26		
X09-27	1 11/16		189	157	23	14	40	16	116	55.6	19.0	M14	1/2	UCF X09-27	FL X09	2.4
X09-28	1 3/4													UCF X09-28		
X09														UCF X09		
UCFL X10-31	1 15/16	50	8 1/2	7 1/4	1 1/32	25/32	1 23/32	3/4	5 1/4	2 11/32	0.8740			UCF X10-31		
X10			216	184	26	20	44	19	133	59.4	22.2	M14	5/8	UCF X10	FL X10	3.7
X10-32	2													UCF X10-32		

Take-up Units

UCST 200 (wide inch slot)

UCT 200 (narrow metric slot)

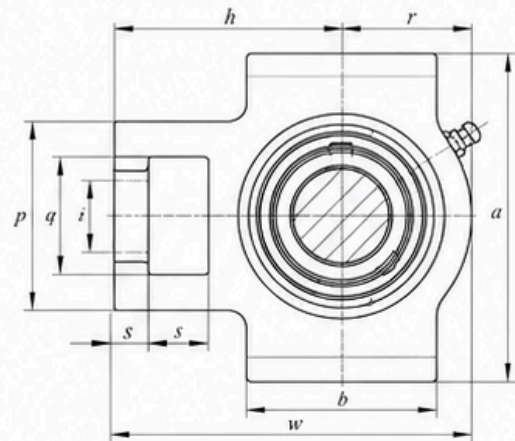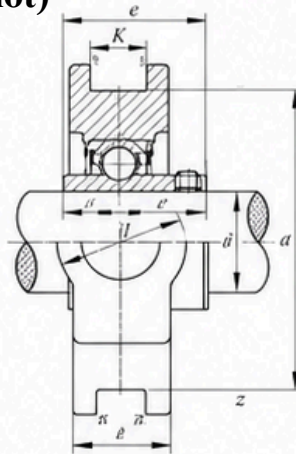


Bearing Unit No.	Shaft Dia. (in.)	Dimensions (in.) or (mm)													Bearing No.	Housing No.	Weight (kg)
		o	g	p	q	s	b	k	e	a	w	r	Bi	n			
UCST 204-12 204	3/4	5/8	13/32	2	1 1/4	3/4	2	17/32	2 63/64	3 1/2	2 11/16	1 1/4	1.5386	0.5630	UC 204-12 204	ST 204	1.85
UCST 205-14 205-15 205-16	7/8 15/16 1	5/8	13/32	2	1 1/4	3/4	2	17/32	2 63/64	3 1/2	2 11/16	1 1/4	15/16	0.5630	UC 205-14 205-15 205-16	ST 205	1.78
UCST 206-17 206-18 206-19 206-20	1 1/16 1 1/8 1 3/16 1 1/4	5/8	13/32	2 7/32	1 15/32	55/64	2 1/4	17/32	3 1/16	4 1/2	2 7/16	1 15/32	1.5000	0.6260	UC 206-17 206-18 206-19 206-20	ST 206	2.42
UCST 207-20 207-21 207-22 207-23	1 1/4 1 5/16 1 3/8 1 7/16	5/8	1/2	2 17/32	1 15/32	55/64	2 17/32	17/32	3 1/2	4 7/16	2 3/4	1 3/16	1.6897	0.6890	UC 207-20 207-21 207-22 207-23	ST 207	3.63
UCST 208-24 208-25 208	1 1/2 1 9/16	3/4	5/8	3 9/32	1 15/16	3 9/16	3 9/32	1 1/16	4 1/4	5 3/4	2 15/32	1 5/16	1 25/32	0.7480	UC 208-24 208-25 208	ST 208	5.30
UCST 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	3/4	5/8	3 9/32	1 15/16	3 9/16	3 9/32	1 1/16	4 1/4	5 3/4	2 15/32	1 5/16	1 25/32	0.7480	UC 209-26 209-27 209-28 209	ST 209	5.30
UCST 210-30 210-31 210 210-32	1 7/8 1 15/16 2	3/4	5/8	3 9/32	1 15/16	3 9/16	3 9/32	1 1/16	4 1/4	5 3/4	2 15/32	1 5/16	1 25/32	0.7480	UC 210-30 210-31 210 210-32	ST 210	5.40
UCST 211-32 211-34 211 211-35	2 2 1/8 2 3/16	1	3/4	4 1/32	2 1/8	3 3/4	4 1/16	1 1/8	5 29/32	7 1/2	2 23/32	1 27/32	2 29/32	0.9842	UC 211-32 211-34 211 211-35	ST 211	9.04
UCST 212-36 212-38 212-39	2 1/4 2 3/8 2 7/16	1 1/4	3/4	4 1/32	2 1/8	3 13/16	4 1/16	1 1/8	5 29/32	7 1/2	2 23/32	1 27/32	2 5/32	1.0000	UC 212-36 212-38 212-39	ST 212	11.0
UCST 213-40 213	2 1/2	1 1/4	13/16	4 3/8	2 3/4	3 13/16	4 3/4	1 1/16	6 5/16	8 1/16	2 3/32	1 15/32	2 21/32	1.0000	UC 213-40 213	ST 213	15.5

Bearing Unit No.	Shaft Dia. (in.)	Dimensions (in.) or (mm)													Bearing No.	Housing No.	Weight (kg)
		o	g	p	q	s	b	k	e	a	w	r	Bi	n			
UCT 201	1/2	16	10	51	32	19	51	12	76	89	94	32	61	12.7	UC 201	T 201	0.76
UCT 202	5/8	16	10	51	32	19	51	12	76	89	94	22	61	12.7	UC 202	T 202	0.74
UCT 203	17	16	10	51	32	19	51	12	76	89	94	32	61	12.7	UC 203	T 203	0.73
UCT 204	20	16	10	51	32	19	51	12	76	89	94	32	61	12.7	UC 204	T 204	0.76
UCT 205	25	16	10	64	37	22	64	12	89	102	113	37	76	14.3	UC 205	T 205	1.15
UCT 206	30	16	10	64	37	22	64	12	89	102	113	37	26	14.3	UC 206	T 206	1.18
UCT 207	35	19	13	83	49	29	83	16	102	117	144	49	33	15.9	UC 207	T 207	1.87
UCT 208	40	19	13	83	49	29	83	16	102	117	144	49	33	15.9	UC 208	T 208	1.79
UCT 209	45	19	13	83	49	29	83	16	102	117	144	49	35	15.9	UC 209	T 209	2.25
UCT 210	50	22	16	102	64	35	102	16	127	144	167	54	35	19	UC 210	T 210	2.63
UCT 211	55	22	16	102	64	35	102	16	127	144	167	54	102	19	UC 211	T 211	2.70
UCT 212	60	32	19	111	70	41	121	16	151	167	222	70	45	25.4	UC 212	T 212	4.47
UCT 213	65	32	19	111	70	41	121	16	151	167	222	70	45	25.4	UC 213	T 213	3.67
UCT 215	75	32	22	140	89	51	140	19	178	195	260	73	143	31	UC 215	T 215	6.6
UCT 216	80	38	29	124	73	48	157	20	173	198	260	73	54	34.1	UC 216	T 216	7.8
UCT 217	85	38	29	124	73	48	157	20	173	198	260	73	54	34.1	UC 217	T 217	11.1

Take-up Units

UCT 300


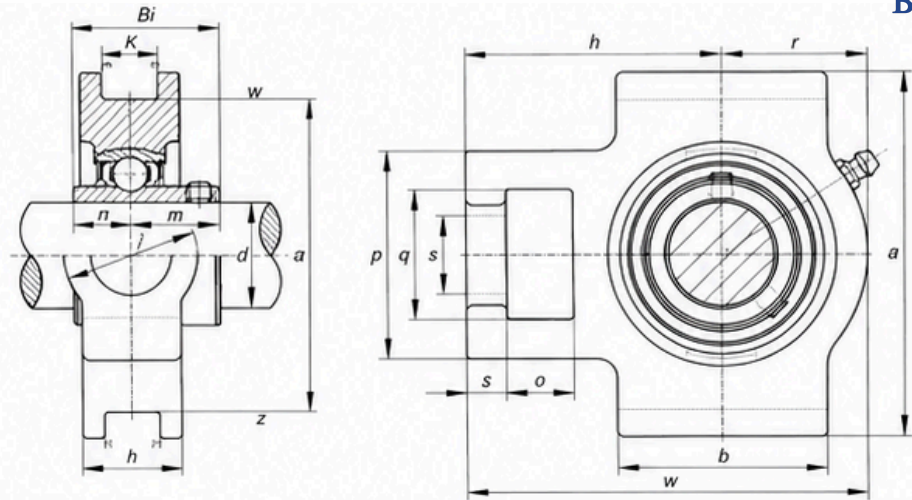


Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)													Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	o	g	p	q	s	b	k	e	a	w	r	Bi	n			
UCT 305 305-16	1 1 1/8	25	5/8	13/32	2	1 1/4	3/4	2	17/32	2 63/64	3 1/2	4 11/16	1 1/4	1.4961	0.5955	UC 305 305-16	T 305	1.4
UCT 306-18 306-20	1 1/8 1 1/4	30	23/32	9/16	2 3/4	1 5/8	1 7/16	2 29/32	5/8	3 35/64	4 15/16	5 1/2	1 5/8	1.6929	1.0236	UC 306-18 306-20	T 306	1.8
UCT 307-20 307-22 307 307-23	1 1/4 1 3/8 1 7/16	35	25/32	19/32	2 15/16	1 25/32	1 3/16	3 5/32	5/8	3 15/16	4 3/8	5 29/32	1.8897	0.7480	1.1417	UC 307-20 307-22 307 307-23	T 307	2.3
UCT 308-24 308	1 1/2	40	7/8	21/32	3 9/32	1 31/32	1 17/64	3 1/2	1 7/16	4 13/32	5 3/8	6 11/32	2.0472	0.7480	1.2992	UC 308-24 308	T 308	3.0
UCT 309-28 309	1 3/4	45	15/16	12/32	3 17/32	2 5/32	1 11/64	3 11/16	1 7/16	4 29/32	5 7/8	6 21/32	2.4411	0.8661	1.3780	UC 309-28 309	T 309	4.1
UCT 310-31 310 310-32	1 7/8 1 15/16 2	50	1 1/16	25/32	3 27/32	2 13/32	1 29/64	4 3/16	1 7/8	6 7/8	7 29/32	2 3/16	2.4015	0.8661	1.5354	UC 310-31 310 310-32	T 310	4.9
UCT 311-32 311	2	55	1 5/32	13/16	4 1/8	2 19/32	1 17/32	4 29/32	2 1/6	5 29/32	7 1/2	8 23/32	2 27/32	0.9942	1.6142	UC 311-32 311	T 311	6.1
UCT 312-36 312	2 1/4 2 3/8 2 7/16	60	1 7/32	29/32	4 7/16	2 29/32	1 27/32	5 5/16	2 7/32	6 15/16	8 15/12	10 15/16	2.7933	1.0236	1.7717	UC 312-36 312	T 312	7.6
UCT 313-40 313	2 1/2	65	1 1/4	13/16	4 3/8	2 3/4	1 39/64	5 13/16	2 9/32	6 7/8	8 13/16	10 23/32	3 1/8	2.9538	1.9117	UC 313-40 313	T 313	9.3
UCT 314-44 314	2 3/4	70	1 13/32	1	5 1/8	3 11/32	1 53/64	6 7/16	3 1/8	7 9/32	9 7/8	11 3/16	3 3/16	3.0792	1.9417	UC 314-44 314	T 314	11.1
UCT 315 315-48	3	75	1 13/32	1	5 5/16	3 11/32	1 53/64	6 7/16	3 1/8	7 11/16	10 3/8	11 23/32	3 1/4	3.2283	1.9655	UC 315 315-48	T 315	13
UCT 316 316-50	3 1/8	80	1 21/32	1 3/32	5 29/32	3 27/32	2 3/32	6 5/16	3 1/8	8 9/32	10 7/8	12 9/16	3 3/8	3.3886	2.0472	UC 316 316-50	T 316	16.2
UCT 317 317-52	3 1/4	85	1 21/32	1 13/16	5 31/32	3 27/32	2 3/32	6 11/16	3 1/8	8 21/32	11 5/8	12 31/32	3 1/2	3.7795	2.0917	UC 317 317-52	T 317	19
UCT 318-56 318	3 1/2	90	1 31/16	2 13/32	6 1/16	4 3/16	2 1/4	6 7/8	3 3/8	9 1/4	12 1/4	13 29/32	3 27/32	1.5798	2.0917	UC 318-56 318	T 318	21.6
UCT 319		95	1 13/16	1 7/32	6 1/2	4 3/8	2 1/4	7 3/32	3 3/8	9 27/32	13	14 1/32	2 3/4	1.6142	2.4409	UC 319	T 319	24.9
UCT 320 320-64	4	100	1 7/8	1 1/4	6 7/8	4 17/32	2 21/64	7 7/8	3 1/2	10 5/8	14 29/32	15 11/16	4.2519	1.6535	2.5984	UC 320 320-64	T 320	30.7
UCT 322	110	110	2 1/16	1 1/2	6 9/32	4 29/32	2 9/16	8 15/32	3 1/2	11 13/16	15 5/32	17 11/32	3 5/32	1.6063	1.7933	UC 322	T 322	39.7
UCT 324	120	120	2 3/8	2 1/32	8 9/32	5 1/2	2 3/4	9 1/16	3 7/8	13	16 1/2	18 3/4	3 15/32	4.9606	2.0079	UC 324	T 324	54.4
UCT 326	130	130	2 9/16	2 25/32	9 27/32	5 13/16	3	10 13/32	4	14 3/16	17 11/16	19 23/32	5.3150	2.1260	3.1890	UC 326	T 326	69.3
UCT 328	140	140	2 3/4	3 19/32	10 15/16	6 5/16	3 1/8	11 15/32	4 1/16	15 3/4	18 11/32	21 19/32	5.9055	2.3228	3.3858	UC 328	T 328	85.1

Pillow Blocks

(High center height)


UCPH 200

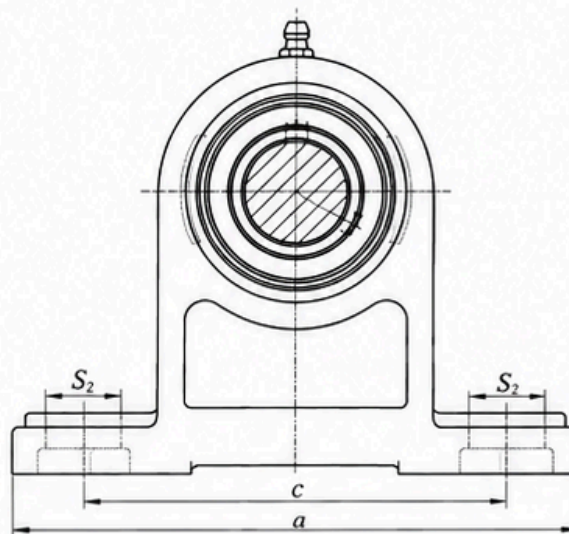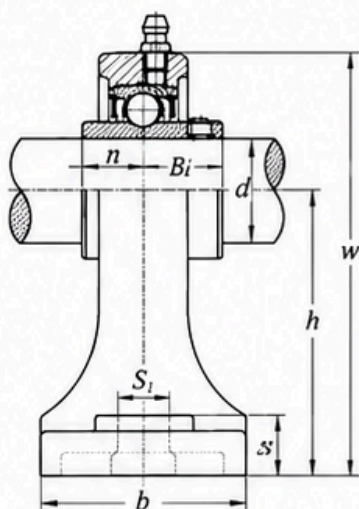

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)										Bolt Used	Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	h	a	e	b	S ₁	s	g	w	B ₁	n				
UCPH 201	1/2	12	2 3/4 70	5 127	3 3/4 95	1 9/16 40	3/4 19	1/2 13	35/64 15	3 31/32 101	1.2205 31.0	0.5000 12.7	M10	UC 201	PH 201	0.96
UCPH 202	5/8	15	2 3/4 70	5 127	3 3/4 95	1 9/16 40	3/4 19	1/2 13	35/64 15	3 31/32 101	1.2205 31.0	0.5000 12.7	M10	UC 202	PH 202	0.96
UCPH 203	11/16	17	2 3/4 70	5 127	3 3/4 95	1 9/16 40	3/4 19	1/2 13	35/64 15	3 31/32 101	1.2205 31.0	0.5000 12.7	M10	UC 203	PH 203	0.96
UCPH 204	3/4	20	2 3/4 70	5 127	3 3/4 95	1 9/16 40	3/4 19	1/2 13	35/64 15	3 31/32 101	1.2205 31.0	0.5000 12.7	M10	UC 204	PH 204	0.96
UCPH 205-14 205-15 205-16	7/8 15/16 1	25	3 5/32 80	5 1/2 140	4 1/8 105	1 31/32 50	3/4 19	1/2 13	5/8 16	4 1/2 114	1.3425 34.1	0.5630 14.3	M10	UC 205-14 205-15 205-16	PH 205	1.2
UCPH 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	3 35/64 90	6 1/2 165	4 3/4 121	1 31/32 50	13/16 21	21/32 17	23/32 18	5 1/8 130	1.5000 38.1	0.6260 15.9	M14	UC 206-18 206 206-19 206-20	PH 206	1.6
UCPH 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	3 47/64 95	6 9/16 167	5 127	2 3/8 60	13/16 21	21/32 17	23/32 18	5 1/2 140	1.6890 42.9	0.6869 17.5	M14	UC 207-20 207-21 207-22 207 207-23	PH 207	2.0
UCPH 208-24 208-25 208	1 1/2 1 9/16	40	3 15/16 100	7 1/4 184	5 13/32 137	2 3/4 70	13/16 21	21/32 17	25/32 20	5 29/32 150	1.9370 49.2	0.7480 19.0	M14	UC 208-24 208-25 208	PH 208	2.7
UCPH 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	4 9/64 105	7 15/32 190	5 3/4 146	2 3/4 70	13/16 21	21/32 17	25/32 20	6 7/32 158	1.9370 49.2	0.7480 19.0	M14	UC 209-26 209-27 209-28 209	PH 209	3.0
UCPH 210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	4 21/32 110	8 1/8 206	6 1/4 159	2 3/4 70	7/8 22	25/32 20	7/8 22	6 1/2 165	2.0315 51.6	0.7480 19.0	M16	UC 210-30 210-31 210 210-32	PH 210	3.5

Tapped-base Pillow Blocks


UCPA 200

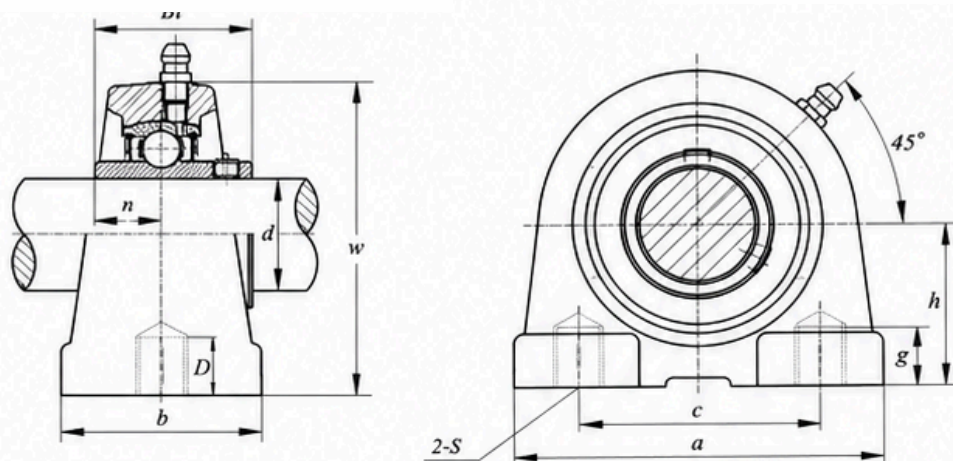

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)									Bolt size (mm)	Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	h	a	e	b	Bi	n	g	c	S				
UCPA 201	1/2	12	1 3/16 30.2	3 76	2 3/64 52	1 9/16 40	10	7/16 11	2 7/16 62	1/2 13	1.2205 12.7	M 10	UC 201	PA 201	0.64
UCPA 202	5/8	15	1 3/16 30.2	3 76	2 3/64 52	1 9/16 40	10	7/16 11	2 7/16 62	1/2 13	1.2005 12.7	M 10	UC 202	PA 202	0.64
UCPA 203	11/16	17	1 3/16 30.2	3 76	2 3/64 52	1 9/16 40	10	7/16 11	2 7/16 62	1/2 13	1.2205 12.7	M 10	UC 203	PA 203	0.64
UCPA 204	3/4	20	1 3/16 30.2	3 76	2 3/64 52	1 9/16 40	10	7/16 11	2 7/16 62	1/2 13	1.2205 12.7	M 10	UC 204	PA 204	0.51
UCPA 205-14 205-15 205-16	7/8 15/16 1	25	1 7/16 36.5	3 5/16 84	2 13/64 56	1 25/32 45	10	15/32 12	2 27/32 72	1/2 13	1.3380 14.3	M 10	UC 205-14 205-15 205-16	PA 205	0.70
UCPA 206-18 206 206-19	1 1/8 1 3/16 -	30	1 11/16 42.9	3 11/16 94	2 19/32 66	1 31/32 50	14	15/32 12	3 5/16 84	23/32 18	0.6260 15.9	M 14	UC 206-18 206 206-19	PA 206	1.2
UCPA 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 - 1 7/16	35	1 7/8 47.6	4 11/32 110	3 5/32 80	2 5/32 55	14	1/2 13	3 3/4 95	25/32 20	0.6890 17.5	M 14	UC 207-20 207-21 207-22 207 207-23	PA 207	1.7
UCPA 208-24 208-25 208	1 1/2 1 9/16 -	40	1 15/16 54.2	4 9/16 116	3 5/16 84	2 9/32 58	14	1/2 13	3 3/4 100	25/32 20	0.7480 19.0	M 14	UC 208-24 208-25 208	PA 208	2.0
UCPA 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4 3	45	2 9/64 54.2	4 23/32 120	3 35/64 90	2 3/8 60	14	1/2 13	4 1/4 100	1 25	1.9370 49.0	M 14	UC 209-26 209-27 209-28 209	PA 209	2.2
UCPA 210-30 210-31 210 210-32	1 7/8 1 15/16 - 2	50	2 1/4 57.5	5 1/8 130	3 45/64 94	2 17/32 64	16	9/16 14	4 9/16 116	1 25	2.0315 19.0	M 16	UC 210-30 210-31 210 210-32	PA 210	2.8

Adjustable Flange Units



UCFA 200

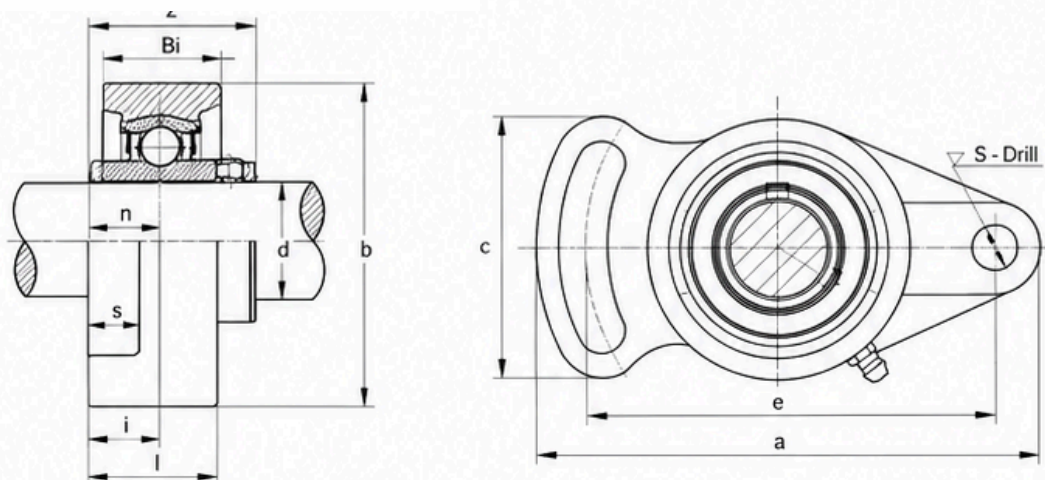

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)									Bolt Used (in.)	Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	a	e	i	l	g	z	c	Bi	n				
UCFA 201 201-8	1/2	12	3 27/32 98	3 5/64 78	19/32 15	7/16 11	1 1/25 25.5	25/64 10	2 23/64 60	1 5/16 33.3	1.2206 12.7	M8 5/16	UC 201 201-8	FA 201	0.47
UCFA 202 202-10	5/8	15	3 27/32 98	3 5/64 78	19/32 15	7/16 11	1 1/25 25.5	25/64 10	2 23/64 60	1.2205 33.3	0.5000 12.7	M8 5/16	UC 202 202-10	FA 202	0.47
UCFA 203 203-11	11/16	17	3 27/32 98	3 5/64 78	19/32 15	7/16 11	1 1/25 25.5	25/64 10	2 23/64 60	1 5/16 33.3	0.5000 12.7	M8 5/16	UC 203 203-11	FA 203	0.47
UCFA 204 204	3/4	20	3 27/32 98	3 5/64 78	19/32 15	7/16 11	1 1/25 25.5	25/64 10	2 23/64 60	1.2205 33.3	0.5000 12.7	M8 5/16	UC 204 204	FA 204	0.47
UCFA 205-14 205-15 205 205-16	7/8 15/16 1	25	4 7/8 124	3 55/64 98	5/8 16.0	33/64 13	1 1/16 27	15/32 12	2 3/4 70	1 13/32 35.7	0.5630 14.3	M10 3/8	UC 205-14 205-15 205 205-16	FA 205	0.68
UCFA 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	5 9/16 141	4 39/64 117	45/64 18	33/64 13	1 7/32 31	15/32 12	3 9/32 83	1 37/64 40.2	0.6260 15.9	M10 3/8	UC 206-18 206 206-19 206-20	FA 206	1.0
UCFA 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	6 3/32 155	5 1/8 130	3/4 19	9/16 14	1 11/32 34	35/64 14	3 25/32 96	1 3/4 44.4	0.6890 17.5	M12 7/16	UC 207-20 207-21 207-22 207 207-23	FA 207	1.4
UCFA 208-24 208-25 208	1 1/2 1 9/16	40	6 23/32 171	5 43/64 144	53/64 21	9/16 16	1 27/64 36	35/64 14	4 1/8 105	2 1/64 51.2	0.7480 19.0	M12 7/16	UC 208-24 208-25 208	FA 208	1.7
UCFA 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	7 1/16 179	5 53/64 148	55/64 22	9/16 16	1 1/2 38	41/64 16	4 3/8 111	2 1/16 52.2	0.7480 19.0	M14 1/2	UC 209-26 209-27 209-28 209	FA 209	2.1
UCFA 210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	7 7/16 189	6 3/16 157	55/64 22	9/16 16	1 37/64 40	41/64 16	4 9/16 116	2 5/32 54.6	2.7480 19.0	M14 1/2	UC 210-30 210-31 210 210-32	FA 210	2.4
UCFA 211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	8 1/2 216	7 1/4 184	63/64 25	5/8 16	1 11/16 43	41/64 16	5 1/4 133	2 19/64 58.4	2.1890 22.2	M14 1/2	UC 211-32 211-34 211 211-35	FA 211	3.4

Flange Bracket Units



UCFB 200

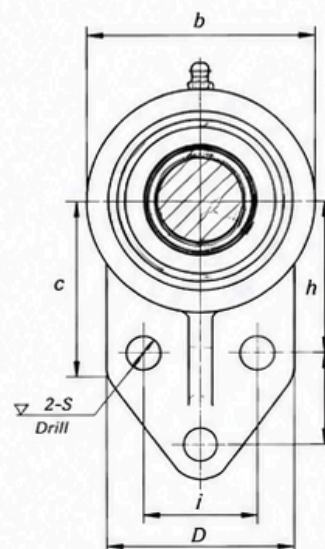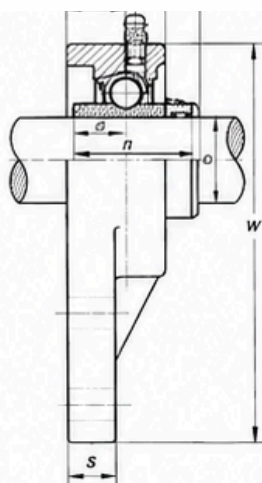

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)											Bolt Used (in.)	Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	w	b	c	D	w	s	e	h	z	zi	n				
UCFB 201 201-8	1/2	12	4 11/32 110	2 7/16 62	2 7/16 62	2 1/2 63	25/32 20	5/8 16	1 7/16 36.5	2 7/16 62	1.2205 50	0.5000 32.7	0.5000 12.7	M8 5/16	UC 201 201-8	FB 201	0.64
UCFB 202 202-10	5/8	15	4 11/32 110	2 7/16 62	2 7/16 62	2 1/2 63	25/32 20	5/8 16	1 7/16 36.5	2 7/16 62	1 3/32 50	0.2000 31.0	0.5000 12.7	M8 5/16	UC 202 202-10	FB 202	0.64
UCFB 203 203-11	11/16	17	4 11/32 110	2 7/16 62	2 7/16 62	2 1/2 63	25/32 20	5/8 16	1 7/16 36.5	2 7/16 62	1.2205 50	0.5000 31.0	0.5000 12.7	M8 5/16	UC 203 203-11	FB 203	0.64
UCFB 204 204	3/4	20	4 11/32 110	2 7/16 62	2 7/16 62	2 1/2 63	25/32 20	5/8 16	1 7/16 36.5	2 7/16 62	1 3/32 50	0.5630 31.0	0.5000 12.7	M8 5/16	UC 204 204	FB 204	0.64
UCFB 205-14 205-15 205-16	7/8 15/16 1	25	4 7/16 116	2 11/16 68	2 11/16 68	2 13/16 72	15/32 12	1/2 13	1 9/16 39.5	2 7/16 62	1 7/16 45	0.3530 34.1	0.5630 14.3	M10 3/8	UC 205-14 205-15 205-16	FB 205	0.68
UCFB 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	5 1/4 132	3 3/20 80	2 19/32 66	3 1/8 80	15/32 12	5/8 16	1 31/32 50	2 9/16 65	1 17/64 32	0.5060 38.1	0.6260 15.9	M10 3/8	UC 206-18 206 206-19 206-20	FB 206	0.92
UCFB 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 — 1 7/16	35	5 11/32 144	3 1/8 79	2 17/32 62	3 5/16 85	11/32 9	9/16 14	2 11/64 54	2 9/16 65	1 17/64 32	0.6890 42.9	0.6890 17.5	M12 7/16	UC 207-20 207-21 207-22 207 207-23	FB 207	1.3
UCFB 208-24 208-25 208	1 1/2 1 9/16 —	40	6 15/32 164	3 15/16 100	2 27/32 72	3 7/16 87	27/64 11	5/8 16	2 3/8 60	2 11/16 68	1 39/64 41	0.7480 49.2	0.7480 19.0	M12 7/16	UC 208-24 208-25 208	FB 208	1.8
UCFB 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4 —	45	6 9/10 175	4 1/16 106	3 76	3 5/32 80	1 1/2 38	5/8 16	2 13/16 71	2 11/16 68	1 13/64 43	0.7480 49.2	0.7480 19.0	M14 1/2	UC 209-26 209-27 209-28 209	FB 209	2.0
UCFB 210-30 210-31 210 210-32	1 7/8 1 15/16 2 —	50	7 1/4 184	4 15/16 126	3 7/32 82	3 7/8 96	37/64 15	3/4 19	2 11/16 68	2 13/16 71	2 5/32 54	2.0315 51.6	0.7480 19.0	M14 1/2	UC 210-30 210-31 210 210-32	FB 210	2.5
UCFB 211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	8 1/2 216	5 7/16 138	3 15/32 88	4 1/2 113	11/16 17	7/8 22	3 5/32 80	3 76	2 19/64 58	0.8740 22.2	0.8740 22.2	M14 1/2	UC 211-32 211-34 211 211-35	FB 211	3.4

Screw Conveyor Hanger Units


UCHA 200

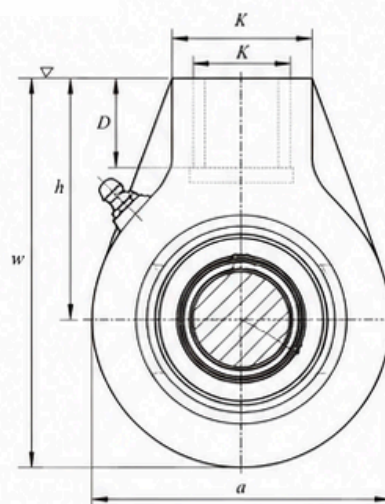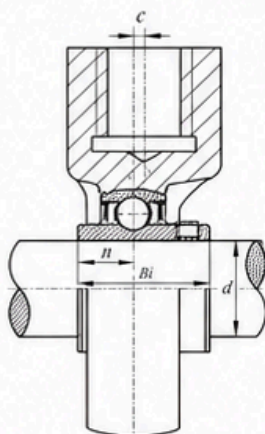

Bearing Unit No.	Shaft Dia. d		Dimensions (in./or mm)								Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	a	w	c	h	l	K	Bi	n			
UCHA 201-201-8	1/2	12	2 17/32 64	3 25/32 96	0	2 33/64 64	1 9/16 40	3/4 19	1.2205 31.0	0.5000 12.7	UC 201-201-8	HA 201	0.77
UCHA 202-202-10	5/8	15	2 17/32 64	3 25/32 96	0	2 33/64 64	1 9/16 40	3/4 19	1.2205 31.0	0.5000 12.7	UC 202-202-10	HA 202	0.77
UCHA 203-203-11	11/16	17	2 17/32 64	3 25/32 96	0	2 33/64 64	1 9/16 40	3/4 19	1.2205 31.0	0.5000 12.7	UC 203-203-11	HA 203	0.77
UCHA 204-12 204	3/4	20	2 17/32 64	3 25/32 96	0	2 33/64 64	1 9/16 40	3/4 19	1.2205 31.0	0.5000 12.7	UC 204-12 204	HA 204	0.77
UCHA 205-14 205-15 205 205-16	7/8 15/16 1	25	3 1/16 78	4 1/16 103	0	2 33/64 64	1 9/16 40	3/4 19	33/5 34	1.3420 14.3	UC 205-14 205-15 205 205-16	HA 205	0.87
UCHA 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	3 1/16 78	4 1/16 103	0	2 33/64 64	1 9/16 40	3/4 19	G3/4 38.1	1.5000 15.9	UC 206-18 206 206-19 206-20	HA 206	0.83
UCHA 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 3/16	35	3 5/8 92	4 9/16 116	0	2 3/4 70	1 9/16 40	3/4 19	G3/4 4.9	1.6890 17.5	UC 207-20 207-21 207-22 207 207-23	HA 207	1.20
UCHA 208-24 208-25 208	1 1/2 1 9/16	40	3 25/32 96	4 3/4 121	5 64 2	2 7/8 73	1 9/16 40	3/4 19	G3/4 42	1.9370 19.0	UC 208-24 208-25 208	HA 208	1.30
UCHA 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	4 1/4 108	5 11/32 136	13/64 5	3 15/64 82	1 7/8 48	13/16 21	G1	1.9370 19.9	UC 209-26 209-27 209-28 209	HA 209	1.70
UCHA 210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	4 21/32 118	5 19/32 142	13/64 5	3 17/64 83	1 7/8 48	13/16 21	G1	2.0315 19.0	UC 210-30 210-31 210 210-32	HA 210	2.10
UCHA 211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	4 31/32 126	5 29/32 150	9/32 7	3 3/4 95	2 3/8 60	1 25	G1 1/4	2.1890 55.6	UC 211-32 211-34 211 211-35	HA 211	2.80
UCHA 212-36 212 212-38 212-39	2 1/4 2 3/8 2 7/16	60	5 19/32 142	6 13/16 173	23/64 9	4 1/64 102	2 3/8 60	1 3/32 28	G1 1/4	5.5630 65.1	UC 212-36 212 212-38 212-39	HA 212	3.90
UCHA 213-40 213	2 1/2	65	6 17/32 166	7 7/8 200	3/8 9.5	4 39/64 117	2 3/4 70	1 1/4 32	G1 1/2	2.5630 25.4	UC 213-40 213	HA 213	5.80
UCHA 214-44 214	2 3/4	70	6 17/32 166	7 7/8 200	3/8 9.5	4 39/64 117	2 3/4 70	1 1/4 32	G1 1/2	2.9370 74.6	UC 214-44 214	HA 214	5.90
UCHA 215 215-47 215-48	2 15/16 3	75	6 17/32 166	7 7/8 200	3/8 9.5	4 39/64 117	2 3/4 70	1 1/4 32	G1 1/2	3.0630 77.8	UC 215 215-47 215-48	HA 215	5.60

Ball Bearings (with setscrews)


UC 200

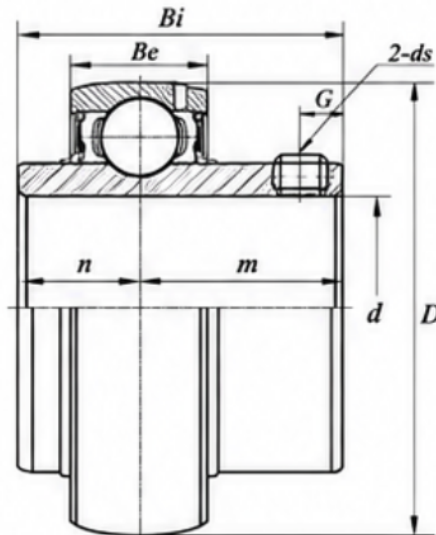

Bearing No.	Shaft Dia.		Dimensions (in.) or (mm)							Basic Dynamic Load Rating (kg)	Basic Static Load Rating (kg)	Weight (kg)
	(in.)	(mm)	Bi	Be	n	m	d	G	ds			
UC 201 201-8	1/2	12	1.2205 31.0	0.6693 17	0.5000 12.7	0.7205 18.3	0.1969 5	1/4-28UNF M6X1.0		1000	630	0.20 0.20
UC 202 202-10	5/8	15	1.2205 31.0	0.6693 17	0.5000 12.7	0.7205 18.3	0.1969 5	1/4-28UNF M6X1.0		1000	630	0.18 0.18
UC 203 203-11	11/16	17	1.2205 31.0	0.6693 17	0.5000 12.7	0.7205 18.3	0.1969 5	1/4-28UNF M6X1.0		1000	630	0.16 0.16
UC 204 204	3/4	20	1.2205 31.0	0.6693 17	0.5600 12.7	0.7705 19.8	0.1969 5	1/4-28UNF M6X1.0		1000	630	0.16 0.15
UC 205-14 205-15 205 205-16	7/8 15/16 1	25	1.3386 34	0.6693 17	0.5630 14.3	0.7795 19.8	0.2165 5.5	1/4-28UNF M6X1.0		1100	710	0.22 0.20 0.19 0.19
UC 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	1.5000 38.1	0.7480 19	0.6260 15.9	0.8740 22.2	0.2362 6	1/4-28UNF M6X1.0		1520	1020	0.32 0.30 0.30 0.30
UC 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	1.6890 42.9	0.7874 20	0.6890 17.5	1.0000 25.4	0.2559 6.5	5/16-24UNF M8X1.0		2010	1390	0.51 0.48 0.45 0.45 0.42
UC 208-24 208-25 208	1 1/2 1 9/16	40	1.9370 49.2	0.8268 21	0.7480 19	1.1890 30.2	0.3150 8	5/16-24UNF M8X1.0		2560	1810	0.63 0.60 0.59
UC 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	1.9370 49.2	0.8661 22	0.7480 19	1.1890 30.2	0.3150 8	5/16-24UNF M8X1.0		2560	1810	0.76 0.72 0.68 0.66
UC 210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	2.0315 51.6	0.9149 24	0.7480 19	1.2835 32.6	0.3937 10	3/8-24UNF M10X1.0		2750	2020	0.82 0.77 0.75 0.73
UC 211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	2.1890 55.6	0.9843 25	0.8740 20	1.3150 33.4	0.3937 10	3/8-24UNF M10X1.0		3400	2550	1.10 1.00 0.97 0.95
UC 212-36 212-38 212-39	2 1/4 2 3/8 2 7/16	60	2.5630 65.1	1.0630 27	1.0000 25.4	1.5630 39.7	0.3937 10	3/8-24UNF M10X1.0		4100	3150	1.50 1.38 1.29
UC 213-40 213	2 1/2	65	2.5630 65.1	1.1024 28	1.0000 25.4	1.5630 39.7	0.3937 10	3/8-24UNF M10X1.0		4480	3470	1.73 1.67
UC 214-44 215 215-47 215-48	2 15/16 3	75	2.9370 74.6	1.1811 30	1.1890 30.2	1.7520 44.5	0.4724 12	7/16-20UNF M12X1.5		5190	4190	2.18 2.10 2.10
UC 216 216-50	3 1/8	80	3.2520 82.6	1.2992 33	1.3110 33.3	1.9410 49.3	0.4724 12	7/16-20UNF M12X1.5		5700	4550	2.64
UC 217-52 217	3 1/4	85	3.3740 85.7	1.3780 35	1.3425 34.1	2.0315 51.6	0.4724 12	7/16-20UNF M12X1.5		6600	5320	3.20 3.10
UC 218-56 218	3 1/2	90	3.7795 96.0	1.4567 37	1.5630 39.7	2.2165 56.3	0.4724 12	7/16-20UNF M12X1.5		7500	6170	4.20 4.10

Ball Bearings (with setscrews)


UC 300

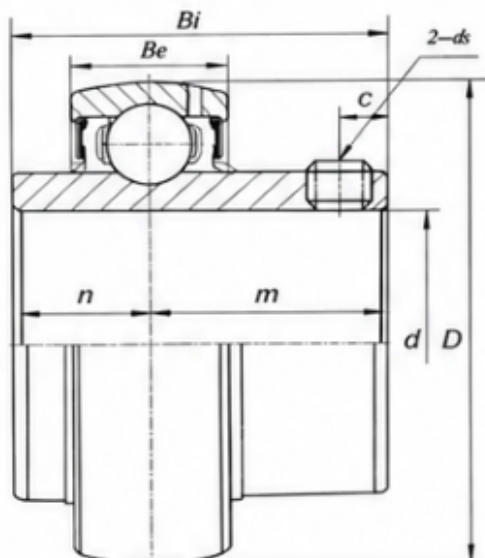

Bearing No.	Shaft Dia. d		Dimensions (in./or mm)							Basic Dynamic Load Rating (kg)	Basic Static Load Rating (kg)	Weight (kg)
	(in.)	(mm)	D	Bi	Be	n	m	G	ds			
UC 305 305-16	1	25	2.4409 62	1.4961 38	0.8661 22	0.5906 15	0.9055 23	0.2362 6	1/4-28UNF M6X1.0	1760	1160	0.45 0.44
UC 306-18 306 306-20	1 1/8 1 1/4	30	2.8346 72	1.6929 43	0.9419 24	0.6693 17	1.0236 26	0.2362 6	1/4-28UNF M6X1.0	2119	1415	0.52
UC 307-20 307-22 307	1 1/4 1 3/8	35	3.1496 80	1.8897 48	1.0236 26	0.7480 19	1.1417 29	0.3150 8	5/6-24UNF M6X1.0	2620	1830	0.77 0.71 0.71
UC 308-24 308	1 1/2	40	3.5433 90	2.0472 52	1.1024 28	0.7480 19	1.2992 33	0.3937 10	3/8-24UNF M10X1.0	3200	2280	1.05 1.00
UC 309-25 309	1 3/4	45	3.9370 100	2.2441 57	1.1811 30	0.8661 22	1.3780 35	0.3937 10	3/8-24UNF M10X1.0	4150	3060	1.23
UC 310-31 310 310-32	1 15/16 2	50	4.3307 110	2.4015 61	1.2595 32	0.8661 22	1.5354 39	0.4724 12	1/2-20UNF M12X1.5	4850	3610	1.57
UC 311-32 311	2	55	4.7244 120	2.5984 66	1.3386 34	0.9842 25	1.6142 41	0.4724 12	1/2-20UNF M12X1.5	5620	4250	1.99
UC 312 312-36	2 1/4	60	5.1181 130	2.7953 71	1.4173 36	1.0236 26	1.7717 45	0.4724 12	1/2-20UNF M12X1.5	6420	4960	2.52
UC 313-40 313	2 1/2	65	5.5118 140	2.9528 75	1.4961 38	1.1811 30	1.7717 45	0.4724 12	1/2-20UNF M12X1.5	7370	5780	3.15
UC 314-44 314	2 3/4	70	5.9055 150	3.0709 78	1.5748 40	1.2992 33	1.7717 45	0.4724 12	1/2-20UNF M12X1.5	8170	6480	3.68
UC 315 315-48	3	75	6.2992 160	3.2283 82	1.6535 42	1.2598 32	1.9685 50	0.5512 14	9/16-18UNF M14X1.5	8900	7310	4.47
UC 316 316-50	3 1/8	80	6.6929 170	3.3858 86	1.7323 44	1.3386 34	2.0472 52	0.5512 14	9/16-18UNF M14X1.5	9650	8330	5.20
UC 317 317-52	3 1/4	85	7.0866 180	3.7795 96	1.8110 46	1.5748 40	2.2047 56	0.6299 16	5/8-18UNF M16X1.5	10410	9130	6.90
UC 318-56 318	3 1/2	90	7.4803 190	3.7795 96	1.8898 48	1.5748 40	2.2047 56	0.6299 16	5/8-18UNF M16X1.5	11300	10300	7.40
UC 319		95	7.8740 200	4.0551 103	1.9685 50	1.6142 41	2.4409 62	0.6299 16	5/8-18UNF M16X1.5	12300	11600	8.91
UC 320 320-64	4	100	8.4646 215	4.2519 108	2.1260 54	1.6335 42	2.5984 66	0.7087 18	5/8-18UNF M16X1.5	13580	13860	10.30
UC 322		110	9.4488 240	4.6063 117	2.3622 60	1.8110 46	2.7953 71	0.7874 20	5/8-18UNF M16X1.5	20500	17900	14.20
UC 324		120	10.2362 260	4.9606 126	2.5197 64	2.0079 51	2.9527 75	0.7874 20	5/8-18UNF M16X1.5	20700	18500	19.00
UC 326		130	11.0236 280	5.3150 135	2.6772 68	2.1260 54	3.1890 81	0.7874 20	3/4-16UNF M20X1.5	22900	21400	23.60
UC 328		140	11.8110 300	5.7066 145	2.8346 72	2.3228 59	3.3858 86	0.7874 20	3/4-16UNF M20X1.5	25300	24600	29.40

Ball Bearings (with setscrews)


UC X00

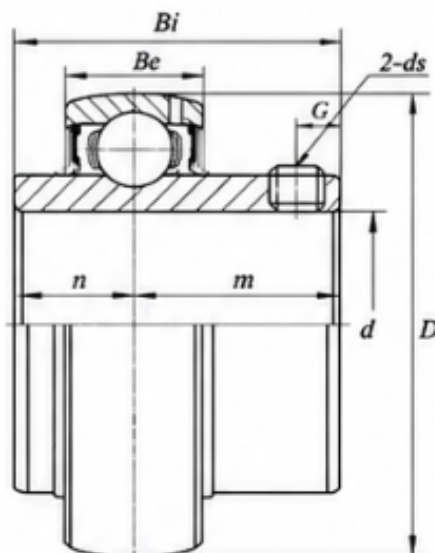

Bearing No.	Shaft Dia.		Dimensions (in.) or (mm)							Basic Dynamic Load Rating (kg)	Basic Static Load Rating (kg)	Weight (kg)
	(in.)	(mm)	Bi	Be	n	m	d	G	ds			
UC X05 X05-16	1	25	2.4409 62	1.5000 38.1	0.7480 19	0.6260 15.9	0.8740 22.2	0.2362 6.0	1/4-28UNF M6X1.0	1520	1020	0.37
UC X06 X06-19 X06-20	1 3/16 1 1/4	30	2.8346 72	1.6890 42.9	0.7874 20	0.6890 17.5	1.0000 25.4	0.2559 6.5	5/16-24UNF M8X1.0	2010	1390	0.54
UC X07-20 X07-22 X07 X07-23	1 1/4 1 3/8 1 7/16	35	3.1496 80	1.9370 49.2	0.8268 21	0.7480 19.0	1.1890 30.2	0.3150 8.0	5/16-24UNF M8X1.0	2560	1810	0.71
UC X08-24 X08	1 1/2	40	3.3465 85	1.9370 49.2	0.8661 22	0.7480 19.0	1.1890 30.2	0.3150 8.0	5/16-24UNF M8X1.0	2650	1910	0.79
UC X09-27 X09-28 X09	1 11/16 1 3/4	45	3.5433 90	2.0315 51.6	0.9149 24	0.7480 19.0	1.2835 32.6	0.3937 10	3/8-24UNF M10X1.0	2750	2020	0.92
UC X10-31 X10 X10-32	1 15/16 2	50	3.9370 100	2.1890 55.6	0.9843 25	0.8740 22.2	1.3150 33.4	0.3937 10	7/8-24UNF M10X1.0	3400	2550	1.20
UC X11 X11-32 X11-35 X11-36	2 2 3/16 2 1/4	55	4.3307 110	2.5630 65.1	1.0630 27	1.0000 25.4	1.5630 39.7	0.3937 10	3/8-24UNF M10X1.0	4100	3150	1.63
UC X12 X12-36 X12-38 X12-39	2 2 3/8 2 7/16	60	4.7241 120	2.5630 65.1	1.1024 28	1.0000 25.4	1.5630 39.7	0.3937 10	3/8-24UNF M10X1.0	4480	3470	1.95
UC X13-40 X13	2 1/2	65	4.9213 125	2.9370 74.6	1.1811 30	1.1890 30.2	1.7480 44.4	0.4724 12.0	7/16-20UNF M12X1.5	4870	3810	2.32
UC X14-44 X14	2 3/4	70	5.1181 130	3.0630 77.8	1.1811 30	1.3110 33.3	1.7520 44.5	0.4724 12.0	7/16-20UNF M12X1.5	5190	4190	2.53
UC X15 X15-47 X15-48	2 15/16 3	75	5.5118 140	3.2520 82.6	1.2598 32	1.3110 33.3	1.9410 49.3	0.5512 14.0	7/16-20UNF M12X1.5	5700	4550	3.06
UC X16 X16-50	3 1/8	80	5.9055 150	3.3740 85.7	1.3386 34	1.3425 34.1	2.0315 51.6	0.5512 14.0	7/16-20UNF M12X1.5	6600	5320	3.61
UC X17-52 X17	3 1/4	85	6.2992 160	3.7795 96.0	1.4173 36	1.5630 39.7	2.2165 56.3	0.5906 15.0	1/2-20UNF M12X1.5	7550	6170	4.55
UC X18-56 X18	3 1/2	90	6.6929 170	4.0945 104.0	1.5748 40	1.6890 42.9	2.4055 61.1	0.6299 16.0	1/2-20UNF M12X1.5	10900	8170	5.42
UC X20 X20-64	4	100	7.4803 190	4.6260 117.5	1.6929 43	1.9370 49.2	2.6890 68.3	0.7087 18.0	1/2-20UNF M12X1.5	13300	10500	7.60

UK Ball Bearings (with tapered bore)


UK 200

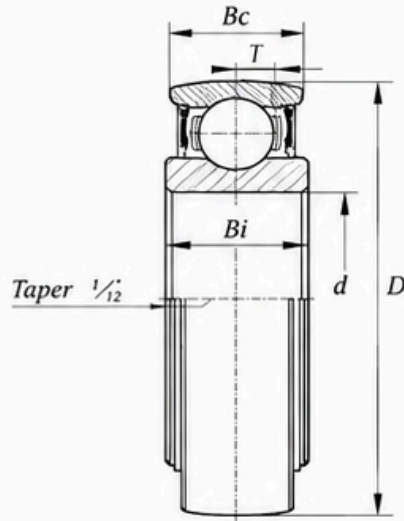


Bearing No.	Shaft Dia. d (mm)	Dimensions (in./or mm)					Basic Dynamic Load Rating (kg)	Basic Static Load Rating (kg)	Weight (kg)
		D	Bi	Be	Bi (TRL)	T			
UK 205	25	2.0472 52	0.9449 24	0.6693 17	0.9449 24	0.1654 4.2	1100	710	0.16
UK 206	30	2.4409 62	1.0630 27	0.7480 19	1.0630 27	0.2017 5.2	1540	1020	0.25
UK 207	35	2.8346 72	1.1024 28	0.7874 20	1.1811 30	0.2205 5.6	2030	1400	0.36
UK 208	40	3.1496 80	1.1811 30	0.8661 21	1.3386 34	0.2411 6.2	2300	1600	0.45
UK 209	45	3.3465 85	1.2205 31	0.8661 22	1.4173 36	0.2480 6.3	2570	1810	0.51
UK 210	50	3.5433 90	1.2205 31	0.9449 24	1.4173 36	0.2559 6.5	2760	2010	0.57
UK 211	55	3.9370 100	1.3386 34	0.9813 25	1.5748 40	0.2756 7.0	3400	2550	0.75
UK 212	60	4.3307 110	1.4173 36	1.0630 27	1.8504 47	0.2756 7.0	4100	3150	1.00
UK 213	65	4.7244 120	1.5354 39	1.1811 30	1.8504 47	0.3346 8.5	4500	3500	1.27
UK 215	75	5.1181 130	1.6535 42	1.2598 32	2.0079 51	0.3622 9.2	5200	4200	1.52
UK 216	80	5.5118 140	1.7323 44	1.2992 33	2.1654 55	0.3780 9.6	5700	4550	1.96
UK 217	85	5.9055 150	1.8110 46	1.3780 35	2.2441 57	0.4134 10.5	6550	5500	2.42
UK 218	90	6.2992 160	1.8898 48	1.4567 37	2.4803 63	0.4370 11.1	7500	6300	3.00

Ball Bearings (with setscrews)


SA 200 (light-duty)
Spherical O.D.

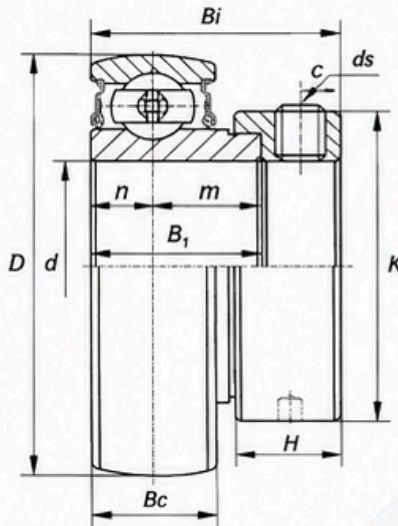

CSA 200 (light-duty)
Cylindrical O.D.

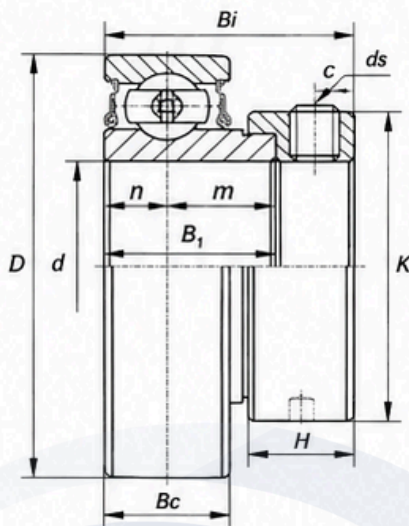

SA 200G
Relubricatable type

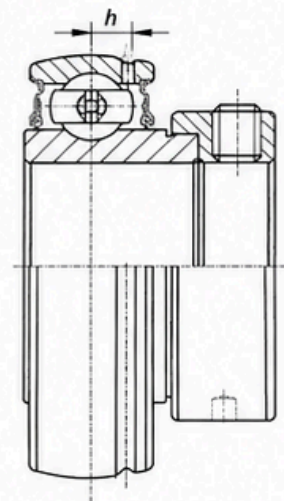


Bearing No.	Shaft Dia.		Dimensions (in.) or (mm)										Basic Dynamic Load Rating (kg)	Basic Static Load Rating (kg)	Weight (kg)
	d		Be	D	B1	n	m	Bi	K	G	h	ds			
	(in.)	(mm)													
SA 201-8	1/2	12	0.4724 12	1.5748 40	0.7520 19.1	0.2326 6.0	0.5157 13.1	1.1260 28.6	0.5315 28.6	0.1966 5.0	0.1417 3.6	1/4-28UNF M6X1.0	960	480	0.13
SA 202-10	5/8	15	0.4724 12	1.5748 40	0.7520 19.1	0.2326 6.0	0.5157 13.1	1.1260 28.6	1.1250 28.6	0.5966 13.5	0.1417 3.6	1/4-28UNF M6X1.0	960	480	0.13
SA 203-11	11/16	17	0.4724 12	1.5748 40	0.7520 19.1	0.2326 6.0	0.5157 13.1	1.1260 28.6	1.5315 13.5	0.1966 5.0	0.1417 3.6	10-32UNF MSX0.8	960	480	0.13
SA 201-12	3/4	20	0.5512 14	1.8504 47	0.8465 21.5	0.2756 7.0	0.5708 14.5	1.2205 31.0	1.3110 33.3	0.3966 5.0	0.1575 4.0	1/4-28UNF M6X1.0	1000	630	0.17
SA 205-14	7/8	25	0.5906 15	2.0472 52	0.8465 21.5	0.2953 7.5	0.5511 14	1.2205 31.0	2.5315 15.5	0.2966 5.0	0.1693 4.3	1/4-28UNF M6X1.0	1100	710	0.20
SA 206-23	1 1/8 1 3/16 1 1/4	30	0.6299 16	2.4409 62	0.9370 23.8	0.3150 8.0	0.6220 35	1.4055 44.5	1.7520 15.9	0.2360 6.0	0.1969 5	5/16-24UNF M8X1.0	1520	1020	0.31
SA 207-23	1 1/4 1 3/8	35	0.6693 17	2.8346 72	1.0000 25.4	0.3316 8.5	0.6853 16.9	1.5315 38.9	2.1890 55.5	0.2559 6.5	0.2411 6.2	5/16-24UNF M8X1.0	2010	1390	0.46
SA 209-26	1 1/8 1 11/16 1 3/4	40	0.7087 18	3.1496 80	1.1890 30.2	0.3543 9.0	0.8346 21.2	1.7205 43.6	2.3740 60.3	0.7265 6.5	0.2411 6.2	5/16-24UNF M8X1.0	2560	1810	0.61
SA 210-30	1 5/8 1 13/16 2	45	0.7480 20	3.1496 90	1.1890 30.2	0.3740 10	0.7559 19.2	1.7165 43.6	2.7520 69.9	0.2255 6.5	0.2677 6.5	5/16-24UNF M8X1.0	3300	2100	0.65
SA 211-35	2 2 1/8 2 3/16	55	0.9419 24	3.1496 100	1.2756 32.4	0.4724 12	0.8032 20.4	1.9055 48.4	3.0000 76.2	0.8150 8	0.2335 7.2	3/8-24UNF M10X1.0	4100	3000	0.87
SA 212-36	2 1/4 2 3/8 2 7/16	60	0.9419 24	4.3307 110	1.3150 33.4	0.4724 12	0.8426 21.4	2.0905 53.1	3.3150 84.2	0.8750 22.3	0.3150 8	3/8-24UNF M10X1.0	4850	2960	1.30


Note: Suffix "G" = Relub. ; Prefix "C" = Cylindrical O.D.

Ball Bearings (with setscrews)


SB 200 (light-duty)
Spherical O.D.

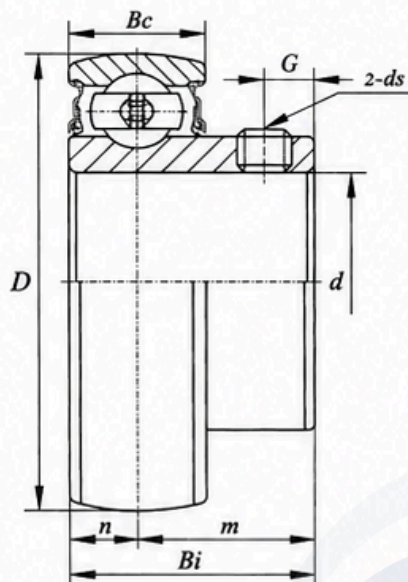

CSB 200 (light-duty)
Cylindrical O.D.

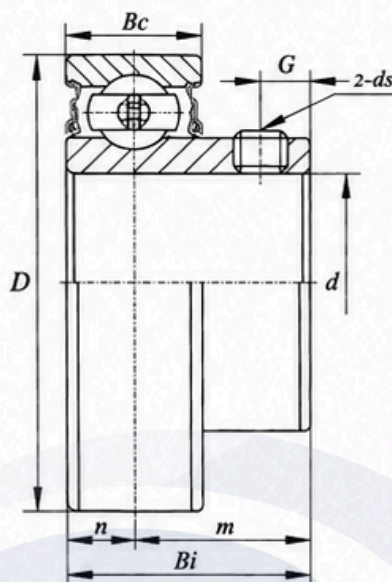

SB 200G
Relubricatable type

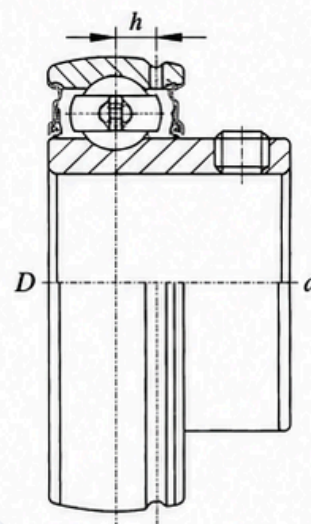

Bearing No.	Shaft Dia.		Dimensions (in.) or (mm)								Basic Dynamic Load Rating (kg)	Basic Static Load Rating (kg)	Weight (kg)
	d		Be	D	Bi	n	m	G	h	ds			
	(in.)	(mm)											
SB 201-18	1/2	12	0.4724 12	1.5748 40	0.8661 22	0.2362 6.0	0.6299 16.0	0.1772 4.5	0.1417 3.6	10-32UNF M5X0.8	760	450	0.10
SB 202-10	5/8	15	0.4724 12	1.5748 40	0.8661 22	0.2362 6.0	0.6299 16.0	0.1772 4.5	0.1417 3.6	10-32UNF M5X0.8	760	450	0.10
SB 203-11	11/16	17	0.4724 12	1.5748 40	0.8661 22	0.2362 6.0	0.6299 16.0	0.1772 4.5	0.1417 3.6	10-32UNF M5X0.8	760	450	0.10
SB 204-12	3/4	20	0.5512 14	1.8504 47	0.9643 25	0.2756 7.0	0.7087 18.0	0.1772 4.5	0.1535 3.9	1/4-28UNF M6X1.0	1000	630	0.12
SB 205-16	7/8	25	0.5906 15	2.0472 52	1.0630 27	0.2953 7.5	0.7677 19.5	0.2165 5.5	0.1535 3.9	1/4-28UNF M6X1.0	1100	710	0.16
SB 206-20	1 1/8 1 3/16 1 1/4	30	0.6299 16	2.4409 62	1.1811 30	0.3150 8.0	0.8661 22.0	0.2165 5.5	0.1969 5.0	1/4-28UNF M6X1.0	1520	1020	0.24
SB 207-23	1 1/4 1 3/8 1 7/16	35	0.6693 17	2.8346 72	1.2598 32	0.3346 8.5	0.9252 23.5	0.2599 6.5	0.2165 5.5	5/16-24UNF M8X1.0	2010	1390	0.42
SB 208-24	1 1/2	40	0.7087 18	3.1496 80	1.3386 34	0.3543 9.0	0.9843 25.0	0.2756 7.0	0.2362 6.0	5/16-24UNF M8X1.0	2560	1810	0.60
SB 209-28	1 5/8 1 11/16 1 3/4	45	0.7480 19	3.3465 85	1.6220 41.2	0.3740 9.5	0.9843 25.0	0.3228 8.2	0.2480 6.3	5/16-24UNF M8X1.0	3260	2450	0.80
SB 210-32	1 7/8 1 13/16 2	50	0.7874 20	3.5433 90	1.6378 41.6	0.3937 10.0	1.2411 31.6	0.3622 9.2	0.2559 6.5	5/16-24UNF M8X1.0	3580	2300	0.83
SB 211-35	2 2 1/8 2 3/16	55	0.9055 21	3.9370 100	1.7835 45.3	0.4646 11.8	0.9843 25.0	0.3858 9.8	0.2335 7.2	5/16-24UNF M8X1.0	4100	2960	1.1
SB 212-36	2 1/4	60	0.9419 24	4.3310 110	2.1142 53.7	0.5866 14.9	0.9843 25.0	0.3858 9.8	0.3150 8	3/8-24UNF M10X1.0	4850	3300	1.3

Note: Suffix "G" = Relub. ; Prefix "C" = Cylindrical O.D.