


Spherical Roller Bearings

22200

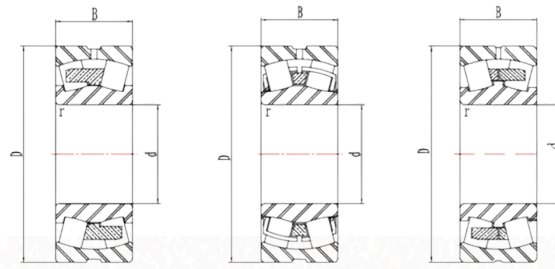


Bearing Model	Basic Size			Weight	Basic Load Rating		Limiting Speed		Adapter sleeve
	d	D	B		Dynamic Cr	Static Cor	Grease	Oil	
	mm				kg	KN		r/min	
22205	25	52	18	0.18	30	38	5500	7000	H305
22206	30	62	20	0.30	30.5	38.2	5300	6700	H306
22207	35	72	23	0.43	45.2	59.5	4800	6000	H307
22208	40	80	23	0.55	49.8	68.5	4500	5600	H308
22209	45	85	23	0.59	52.2	73.2	4000	5000	H309
22210	50	90	23	0.64	52.2	73.2	3800	4800	H310
22211	55	100	25	0.88	60	87.2	3400	4300	H311
22212	60	110	28	1.19	81.8	122	3200	4000	H312
22213	65	120	31	1.60	88.5	128	2800	3600	H313
22214	70	125	31	1.68	95	142	2600	3400	H314
22215	75	130	31	1.75	95	142	2400	3200	H315
22216	80	140	33	2.12	115	180	2200	3000	H316
22217	85	150	36	2.79	145	228	2000	2800	H317
22218	90	160	40	3.78	168	272	1900	2600	H318
22219	95	170	43	4.31	212	322	1800	2400	H319
22220	100	180	46	5.06	222	358	1700	2200	H320
22222	110	200	53	7.40	288	465	1500	1900	H322
22224	120	215	58	9.27	342	565	1300	1700	H3124
22226	130	230	64	11.7	408	708	1200	1600	H3126
22228	140	250	68	14.4	478	805	1000	1400	H3128
22230	150	270	73	18.4	508	875	950	1300	H3130
22232	160	290	80	22.3	642	1140	900	1200	H3132
22234	170	310	86	28.7	720	1300	850	1100	H3134
22236	180	320	86	30.4	735	1370	800	1000	H3136
22238	190	340	92	35.6	818	1510	750	950	H3138
22240	200	360	98	43.9	920	1740	700	900	H3140
22244	220	400	108	61.7	1170	2220	630	800	H3144
22248	240	440	120	83.2	1250	2320	600	780	H3148
22252	260	480	130	105	1840	3550	580	730	H3152
22256	280	500	130	124	1900	3600	560	710	H3156
22260	300	540	140	143	1990	3720	530	680	H3160
22264	320	580	150	175	2300	4050	500	600	H3164
22272	360	650	170	255	3600	6100	450	560	H3172

*For tapered bore bearings add suffix "K"

* Add Suffix 'CC' or 'CA' or 'MB' for respective cage type

Spherical Roller Bearings

22300

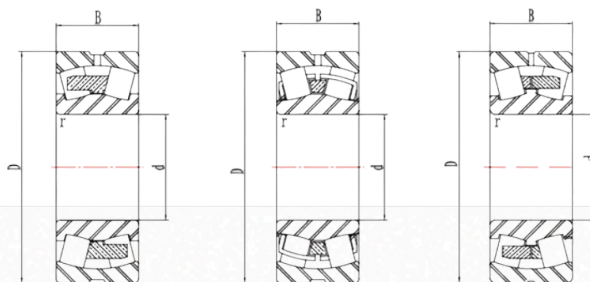


Bearing Model	Basic Size			Weight	Basic Load Rating		Limiting Speed		Adapter sleeve
	d	D	B		Dynamic Cr	Static Cor	Grease	Oil	
	mm				kg	KN		r/min	
22308	40	90	33	1.07	73.5	90.5	4000	5000	H2308
22309	45	100	36	1.40	108	140	3600	4500	H2309
22310	50	110	40	1.85	128	170	3400	4300	H2310
22311	55	120	43	2.42	155	198	3000	3800	H2311
22312	60	130	46	3.00	168	225	2800	3600	H2312
22313	65	140	48	3.65	188	252	2400	3200	H2313
22314	70	150	51	4.40	230	315	2200	3000	H2314
22315	75	160	55	5.47	262	388	2000	2800	H2315
22316	80	170	58	6.63	288	405	1900	2600	H2316
22317	85	180	60	7.40	308	440	1800	2400	H2317
22318	90	190	64	8.96	365	542	1700	2200	H2318
22319	95	200	67	9.93	385	570	1600	2000	H2319
22320	100	215	73	13.7	450	668	1400	1800	H2320
22322	110	240	80	18.0	545	832	1200	1600	H2322
22324	120	260	86	22.9	645	992	1100	1500	H2324
22326	130	280	93	28.2	722	1140	950	1300	H2326
22328	140	300	102	35.1	825	1340	900	1200	H2328
22330	150	320	108	42.0	1020	1740	850	1100	H2330
22332	160	340	114	52.2	1040	1770	800	1000	H2332
22334	170	360	120	60.7	1150	2060	750	950	H2334
22336	180	380	126	72.6	1260	2270	700	900	H2336
22338	190	400	132	82.0	1390	2530	670	850	H2338
22340	200	420	138	92.0	1490	2720	630	800	H2340
22344	220	460	145	115	1600	3020	550	720	H2344
22348	240	500	155	156	1730	3250	500	630	H2348
22352	260	540	165	191	2200	4190	480	600	H2352
22356	280	580	175	233	2420	4650	450	560	H2356
22360	300	620	185	274.5	3250	6150	430	530	H2360
22372	260	750	224	494	4100	7600	400	500	H2372
22380	400	820	243	650	5500	9400	360	465	H2380

*For tapered bore bearings add suffix "K"

* Add Suffix 'CC' or 'CA' or 'MB' for respective cage type

Spherical Roller Bearings

23000

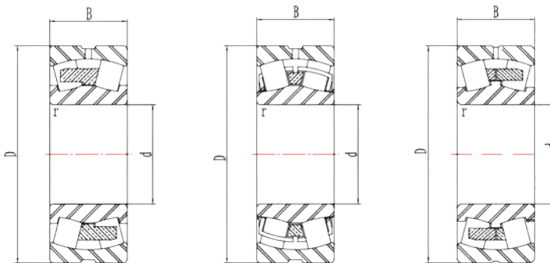

Bearing Model	Basic Size			Weight	Basic Load Rating			Limiting Speed		Adapter Sleeve
	d	D	B		dynamic	static	Grease	Oil		
	mm				kg	Cr	kN	Cor	r/min	
23020	100	150	37	2.51	290		420	2150	3200	H3020
23022	110	170	45	3.8	310		440	1400	1800	H3022
23024	120	180	46	4.2	320		510	1200	1600	H3024
23026	130	200	52	6	340		650	1100	1500	H3026
23028	140	210	53	6.8	365		705	950	1300	H3028
23030	150	225	56	7.95	400		795	900	1200	H3030
23032	160	240	60	9.7	445		875	850	1100	H3032
23034	170	260	67	13	555		1090	800	1000	H3034
23036	180	280	74	17	630		1280	750	950	H3036
23038	190	290	75	18.5	700		1450	700	900	H3038
23040	200	310	82	23	770		1560	670	850	H3040
23044	220	340	90	30.3	935		1900	600	750	H3044
23048	240	360	92	32.6	985		2080	530	680	H3048
23052	260	400	104	49.8	1230		2550	500	660	H3052
23056	280	420	106	54.9	1320		2850	450	600	H3056
23060	300	460	118	73	1610		3450	430	580	H3060
23064	320	480	121	78	1960		3800	400	560	H3064
23068	340	520	133	109	1980		4400	380	540	H3068
23072	360	540	134	114	2280		4800	360	530	H3072
23076	360	560	134	118	2480		5000	340	520	H3076
23080	400	600	148	165	2540		5900	300	510	H3080
23084	420	620	150	175	2700		6400	280	500	H3084
23088	440	650	157	192	2780		6500	260	480	H3088
23092	460	680	163	223	3340		6800	220	460	H3092
23096	480	700	165	231	3450		6950	200	440	H3096
230/500	500	750	167	236	3680		7800	190	410	H30/500
230/530	530	780	185	310	4370		9300	170	380	H30/530
230/560	560	820	195	355	4890		10200	160	350	H30/560
230/600	600	870	200	405	5230		11400	155	320	H30/600
230/630	630	920	212	485	5750		12500	150	290	H30/630
230/670	670	980	230	600	6560		14600	145	280	H30/670
230/710	710	1030	236	670	7250		16300	140	260	H30/710
230/750	750	1090	250	795	8450		18600	135	240	H30/750
230/800	800	1150	258	895	8630		20000	130	220	H30/800
230/850	850	1220	272	1050	9370		21600	125	215	H30/850
230/900	900	1280	280	1200	10100		23200	120	210	H30/900
230/950	950	1360	300	1450	11200		27000	120	210	H30/950
230/1000	1000	1420	308	1550	12000		28500	115	205	H30/1000
230/1060	1060	1500	325	2250	13800		34000	110	200	H30/1060
230/1250	1250	1750	375	2840	17900		45000	110	200	H30/1250


*For tapered bore bearings add suffix "K"

www.ekdbearings.com

* Add Suffix 'CC' or 'CA' or 'MB' for respective cage type

Spherical Roller Bearings

23100

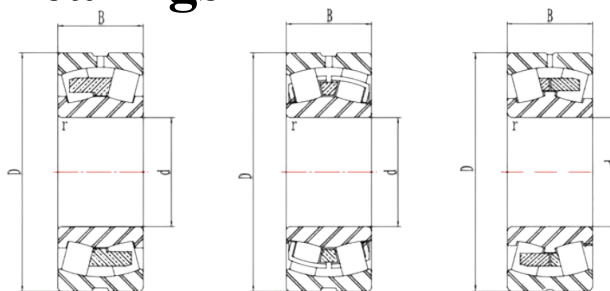


Bearing Model	Basic Size			Weight	Basic Load Rating		Limiting Speed		Adapter sleeve
	d	D	B		dynamic	staic	Grease	Oil	
	mm				kg	KN		r/min	
23120	100	165	52	4.42	320	500	1800	2200	H3120
23121	105	175	56	5.48	325	538	1700	2100	H3121
23122	110	180	56	5.73	387	605	1500	2000	H3122
23124	120	200	62	7.95	405	685	1300	1800	H3124
23126	130	210	64	8.55	430	715	1100	1700	H3126
23128	140	225	68	10.5	490	190	1000	1600	H3128
23130	150	250	80	15.6	745	935	900	1400	H3130
23132	160	270	86	20.5	765	1390	880	1300	H3132
23134	170	280	88	21.5	830	1430	860	1200	H3134
23136	180	300	96	28	900	1720	850	1100	H3136
23138	190	320	104	34.7	975	1840	830	1000	H3138
23140	200	340	112	42.5	1170	2240	820	950	H3140
23144	220	370	120	53.66	1370	2710	800	900	H3144
23148	240	400	128	67.44	1500	3000	780	850	H3148
23152	260	440	144	95.5	1860	3200	730	800	H3152
23156	280	460	146	103	1990	3750	680	750	H3156
23160	300	500	160	134	2310	4150	620	670	H3160
23164	320	540	176	160	3050	4750	580	630	H3164
23168	340	580	190	210	3150	6300	550	600	H3168
23172	360	600	192	222	3250	6850	520	560	H3172
23176	380	620	194	243	3400	8350	380	400	H3176
23180	400	650	200	273	4100	8650	360	380	H3180
23184	420	700	226	350	4250	9200	330	360	H3184
23188	440	720	226	360	4500	10000	300	340	H3188
23192	460	760	240	440	5500	10900	280	320	H3192
23196	480	790	248	485	6100	12000	260	300	H3196
231/500	500	830	264	580	6730	12900	240	280	H31/500
231/530	530	870	272	645	7130	14000	220	260	H31/530
231/560	560	920	280	740	7990	16000	200	240	H31/560
231/600	600	980	300	895	8970	18000	180	200	H31/600
231/630	630	1030	315	1050	10500	20800	170	190	H31/630
231/670	670	1090	336	1250	10900	22400	160	180	H31/670
231/710	710	1150	345	1450	12200	26000	160	180	H31/710
231/750	750	1220	365	1700	13600	29000	150	170	H31/750
231/800	800	1280	375	1920	14800	31500	140	160	H31/800
231/850	850	1360	400	2200	16100	34500	120	140	H31/850
231/1000	1000	1580	462	3500	21400	48000	100	130	H31/1000

*For tapered bore bearings add suffix "K"

* Add Suffix 'CC' or 'CA' or 'MB' for respective cage type

Spherical Roller Bearings

23200

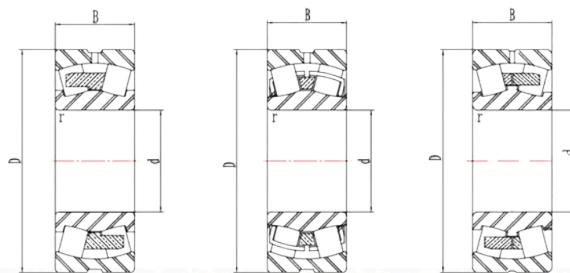


Bearing Model	Basic Size			Weight	Basic Load Rating		Limiting Speed		Adapter sleeve
	d	D	B		dynamic	staic	Grease	Oil	
	mm			kg	KN		r/min		
23218	90	160	52.4	4.82	400	560	1800	2000	H2318
23220	100	180	60.3	6.58	420	605	1700	1900	H2320
23222	110	200	69.8	9.66	502	742	1600	1800	H2322
23224	120	215	76	12	535	940	1500	1700	H2324
23226	130	230	80	14	670	1020	1300	1500	H2326
23228	140	250	88	18.5	910	1365	1200	1400	H2328
23230	150	270	96	24	950	1550	1100	1300	H2330
23232	160	290	104	30	1070	1760	1000	1200	H2332
23234	170	310	110	36.5	1100	1930	950	1150	H2334
23236	180	320	112	39	1160	2130	900	1100	H2336
23238	190	340	120	47.5	1290	2400	850	990	H2338
23240	200	360	128	57	1360	2530	850	990	H2340
23244	220	400	144	79.5	1720	3200	750	890	H2344
23248	240	440	160	110	2080	3950	670	810	H2348
23252	260	480	174	140	2580	4750	630	770	H2352
23256	280	500	176	150	2800	5100	600	740	H2356
23260	300	540	192	190	3300	5600	530	670	H2360
23264	320	580	208	240	3900	6800	500	640	H2364
23268	340	620	224	295	4650	8300	430	570	H2368
23272	360	650	232	335	4660	8350	400	520	H2372
23276	380	680	240	375	5060	9150	380	500	H2376
23280	400	720	256	450	5610	11300	340	460	H2380
23284	420	760	272	535	6150	11900	320	440	H2384
23288	440	790	280	590	6730	12500	320	440	H2388
23292	460	830	296	695	6750	13500	300	420	H2392
23296	480	870	310	800	7350	15200	280	400	H2396
232/500	500	920	336	985	8600	18600	260	340	H23/500
232/530	530	980	355	1200	11100	20400	220	300	H23/530
232/560	560	1030	365	1350	11500	22000	200	280	H23/560
232/600	600	1090	388	1600	13100	25500	190	270	H23/600
232/670	670	1220	438	2270	15400	30500	170	250	H23/670
232/750	750	1360	475	3050	18700	36500	150	230	H23/750

*For tapered bore bearings add suffix "K"

* Add Suffix 'CC' or 'CA' or 'MB' for respective cage type

Spherical Roller Bearings

24000

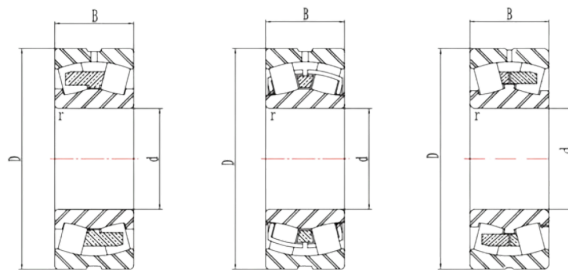


Bearing Model	Basic Size			Weight	Basic Load Rating		Limiting Speed		Adapter sleeve
	d	D	B		dynamic	staic	Grease	Oil	
	mm				kg	KN		r/min	
24013	65	100	35	0.95					
24015	75	115	40	1.95	240	580	2000	2600	H24015
24018	90	140	50	2.8	270	600	1900	2500	H24018
24020	100	150	50	3.02	290	620	1800	2400	H24020
24022	110	170	60	4.98	310	650	1700	2300	H24022
24024	120	180	60	5.4	325	660	1600	2200	H24024
24026	130	200	69	7.95	477	815	1500	2100	H24026
24028	140	210	69	8.45	495	900	1400	2000	H24028
24030	150	225	75	10.5	500	1050	1300	1900	H24030
24032	160	240	80	13	570	1210	1100	1600	H24032
24034	170	260	90	16.7	705	1500	1000	1500	H24034
24036	180	280	100	22.5	835	1750	950	1450	H24036
24038	190	290	100	24	855	1840	950	1450	H24038
24040	200	310	109	30.5	985	2130	900	1400	H24040
24044	220	340	118	34	1150	2500	850	1350	H24044
24048	240	360	118	42.5	1240	2800	800	1300	H24048
24052	260	400	140	64.5	1620	3110	700	1200	H24052
24056	280	420	140	68.5	1780	3700	670	1170	H24056
24060	300	460	160	97	2020	4700	600	1100	H24060
24064	320	480	160	100	2460	5100	560	960	H24064
24068	340	520	180	140	2480	5700	530	930	H24068
24072	360	540	180	145	3110	6550	500	900	H24072
24076	380	560	180	150	3150	6900	480	880	H24076
24080	400	600	200	205	3350	7800	450	850	H24080
24084	420	620	200	210	3600	8450	380	780	H24084
24088	440	650	212	245	4080	8800	360	760	H24088
24092	460	680	218	275	4200	9100	340	740	H24092
24096	480	700	218	285	4490	10000	340	740	H24096
240/500	500	720	218	295	4600	10400	320	720	H240/500
240/530	530	780	250	410	5640	12700	280	580	H240/530
240/560	560	820	258	465	6210	14000	260	560	H240/560
240/600	600	870	272	540	6730	15600	240	540	H240/600
240/630	630	920	290	655	7530	17300	220	520	H240/630
240/670	670	980	308	790	8450	20000	200	500	H240/670
240/710	710	1030	315	895	8970	22000	190	490	H240/710
240/750	750	1090	335	1065	9950	24000	180	380	H240/750
240/800	800	1150	345	1200	10900	27500	170	370	H240/800
240/850	850	1220	365	1410	12000	30000	160	360	H240/850
240/900	900	1280	375	1570	12900	32500	150	350	H240/900
240/950	950	1360	412	1990	14800	39000	130	330	H240/950
240/1000	1000	1420	412	2140	15400	40500	110	235	H240/1000
240/1060	1060	1500	438	2515	17300	45500	100	225	H240/1060
240/1120	1120	1580	462	2925	18700	50000	90	215	H240/1120

*For tapered bore bearings add suffix "K"

* Add Suffix 'CC' or 'CA' or 'MB' for respective cage type

Spherical Roller Bearings

24100

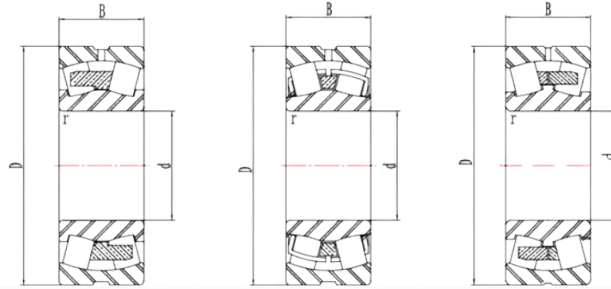


Bearing Model	Basic Size			Weight	Basic Load Rating		Limiting Speed		Adapter sleeve
	d	D	B		dynamic	staic	Grease	Oil	
	mm				kg	KN		r/min	
24120	100	165	65	5	400	850	1420	1650	H24120
24122	110	180	69	6.9	450	900	1300	1530	H24122
24124	120	200	80	9.87	500	960	1100	1330	H24124
24126	130	210	80	11	540	1000	875	1105	H24126
24128	140	225	85	13.2	580	1150	850	1080	H24128
24130	150	250	100	20.4	720	1530	770	1000	H24130
24132	160	270	109	25.4	865	1690	700	930	H24132
24134	170	280	109	27.9	940	1860	660	890	H24134
24136	180	300	118	34.7	1020	2030	630	860	H24136
24138	190	320	128	42.9	1200	2400	600	830	H24138
24140	200	340	140	50.5	1350	2700	540	770	H24140
24144	220	370	150	65	1500	3000	500	710	H24144
24148	240	400	160	80.5	1660	3400	480	690	H24148
24152	260	440	180	110	2100	4350	430	640	H24152
24156	280	460	180	120	2220	4750	430	640	H24156
24160	300	500	200	155	3280	6300	400	610	H24160
24164	320	540	218	210	3740	7100	380	590	H24164
24168	340	580	243	240	4660	8650	350	560	H24168
24172	360	600	243	270	4890	9300	340	520	H24172
24176	380	620	243	300	5060	9800	330	510	H24176
24180	400	650	250	340	5350	10600	320	500	H24180
24184	420	700	280	445	6360	12500	300	480	H24184
24188	440	720	280	460	6560	13200	280	460	H24188
24192	460	760	300	560	7250	14600	260	440	H24192
24196	480	790	308	605	7710	15600	240	420	H24196
241/500	500	830	325	745	8630	17000	220	340	H241/500
241/530	530	870	335	830	9200	19000	200	320	H241/530
241/560	560	920	355	985	10500	21600	190	310	H241/560
241/600	600	980	375	1200	11500	23600	180	300	H241/600
241/630	630	1030	400	1400	12700	27000	170	290	H241/630
241/670	670	1090	412	1600	13800	29000	160	280	H241/670
241/710	710	1150	438	1900	15200	32500	150	270	H241/710
241/750	750	1220	475	2100	17300	37500	140	220	H241/750
241/800	800	1280	475	2300	18400	40500	130	210	H241/800
241/900	900	1420	515	3350	21400	49000	100	180	H241/900
241/1000	1000	1580	580	4300	22500	50000	80	160	H241/1000

*For tapered bore bearings add suffix "K"

* Add Suffix 'CC' or 'CA' or 'MB' for respective cage type

Spherical Roller Bearings

23900/24900

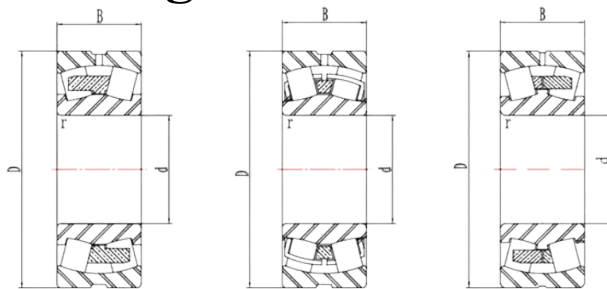


Bearing Model	Basic Size			Weight	Basic Load Rating		Limiting Speed		Adapter sleeve
	d	D	B		dynamic	static	Grease	Oil	
	mm				kg	KN		r/min	
23936	180	250	52	8.2	414	800	1700	2020	H3936
23938	190	260	52	8.4	431	830	1700	2020	H3938
23940	200	280	60	11.5	546	1040	1600	1920	H3940
23944	220	300	60	13	546	1080	1500	1820	H3944
23948	240	320	60	14	564	1160	1300	1620	H3948
23952	260	360	75	24	848	1760	1100	1420	H3952
23956	280	380	75	26	880	1800	1000	1320	H3956
23960	300	420	90	40.5	1200	2500	950	1270	H3960
23964	320	440	90	42	1240	2700	900	1180	H3964
23968	340	460	90	45.5	1270	2800	900	1180	H3968
23972	360	480	90	46.5	1290	2900	850	1130	H3972
23976	380	520	106	69	1730	3800	800	1080	H3976
23980	400	540	106	71	1730	3900	750	1030	H3980
23984	420	560	106	74.5	1760	4150	700	980	H3984
23988	440	600	118	99.5	2100	4900	670	950	H3988
23992	460	620	118	105	2190	5000	430	660	H3992
23996	480	650	128	125	2530	5700	400	630	H3996
239/500	500	670	128	130	2530	6000	400	630	
239/530	530	710	136	155	2820	6700	360	590	
239/560	560	750	140	175	3050	7200	340	570	
239/600	600	800	150	220	3450	8300	320	550	
239/630	630	850	165	280	3970	9800	280	510	
239/670	670	900	170	315	4370	10800	260	440	
239/710	710	950	180	365	4700	12000	240	420	
239/750	750	1000	185	420	5180	13200	220	400	
239/800	800	1060	195	470	5640	14300	200	380	
239/850	850	1120	200	560	5980	15600	190	370	
239/900	900	1180	206	605	6440	17000	180	360	
239/950	950	1250	224	755	7250	19600	170	350	
239/1060	1060	1400	250	1100	9550	26000	160	340	
239/1180	1180	1540	272	1400	11100	31000	150	330	
249/710	710	950	243	495	5870	15600	200	440	
249/750	750	1000	250	560	6560	18000	190	430	
249/800	800	1060	258	640	7020	19300	180	420	
249/850	850	1120	272	740	8170	22800	170	410	
249/950	950	1250	300	1000	9200	26000	160	400	
249/1000	1000	1320	315	1200	10400	29000	150	390	
249/1060	1060	1400	335	1400	11500	32500	140	380	
249/1120	1120	1460	335	1500	11700	34500	130	310	
249/1180	1180	1540	355	1800	13300	39000	120	300	
249/1320	1320	1720	400	2500	16100	49000	110	290	
249/1500	1500	1950	450	3500	20700	63000	100	280	

*For tapered bore bearings add suffix "K"

* Add Suffix 'CC' or 'CA' or 'MB' for respective cage type

Spherical Roller Bearings

23800/24800



Bearing Model	Basic Size			Weight	Basic Load Rating		Limiting Speed		Adapter sleeve
	d	D	B		dynamic	static	Grease	Oil	
	mm			kg	KN		r/min		
23852	260	320	45	8	385	930	850	1300	H3852
23856	280	350	52	12	506	1180	800	1250	H3856
23860	300	380	60	17	644	1560	700	1150	H3860
23864	320	400	60	17.5	673	1660	660	1110	H3864
23868	340	420	60	18.5	690	1730	630	1080	H3868
23872	360	440	60	20	713	1860	600	1050	H3872
23896	480	600	90	61	1440	3750	430	750	H3896
238/500	500	620	90	62	1480	4000	430	750	
238/630	630	780	112	120	2190	6100	320	640	
238/670	670	820	112	130	2250	6400	280	600	
238/750	750	920	128	135	2930	8500	240	420	
238/850	850	1030	136	240	3340	10000	190	370	
238/1000	1000	1220	165	410	4660	14300	150	330	
238/1060	1060	1280	165	435	4770	15000	100	220	
238/1180	1180	1420	180	575	5870	18600	80	200	
24892	460	580	118	75.5	1790	4900	450	700	
248/530	530	650	118	86	1840	5300	380	580	
248/800	800	980	180	300	4140	12900	180	330	
248/900	900	1090	190	370	4660	15300	70	190	
248/1060	1060	1280	218	570	6100	20000	50	160	
248/1120	1120	1360	243	735	7250	24000	45	150	
248/1180	1180	1420	243	770	7710	27000	45	150	
248/1320	1320	1600	280	1160	9780	33500	40	130	


*For tapered bore bearings add suffix "K"

* Add Suffix 'CC' or 'CA' or 'MB' for respective cage type

EKD

Spherical Roller Bearings

21300

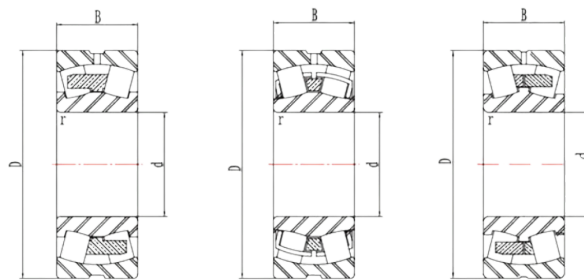

Bearing Model	Basic Size			Weight	Basic Load Rating		Limiting Speed		Adapter sleeve
	d	D	B		dynamic	static	Grease	Oil	
	mm				kg	KN		r/min	
21304	20	52	15	0.16	32	32	6000	7500	H304
21305	25	62	17	0.28	42	45	5300	6700	H305
21306	30	72	19	0.38	52	58	4500	6000	H306
21307	35	80	21	0.5	65	75	4000	5300	H307
21308	40	90	23	0.75	89	99	3600	4500	H308
21309	45	100	25	0.99	106	118	3200	4000	H309
21310	50	110	27	1.3	124	144	2800	3800	H310
21311	55	120	29	1.66	146	175	2600	3400	H311
21312	60	130	31	1.99	167	201	2200	3000	H312
21313	65	140	33	2.45	188	235	2000	2800	H313
21314	70	150	35	2.98	218	276	1900	2600	H314
21315	75	160	37	3.63	245	311	1800	2400	H315
21316	80	170	39	4.29	268	359	1750	2300	H316
21317	85	180	41	5.19	307	397	1700	2200	H317
21318	90	190	43	6.09	330	433	1550	2050	H318
21319	95	200	45	7.1	366	500	1550	1950	H319
21320	100	215	47	8.8	397	546	1450	1850	H320
21321	105	225	49	10	420	575	1200	1500	H321
21322	110	240	50	11.8	460	535	1300	1500	H322

*For tapered bore bearings add suffix "K"

* Add Suffix 'CC' or 'CA' or 'MB' for respective cage type

EKD