


Thrust Ball Bearings



Bearing numbers	Boundary dimensions (mm)				Basic load ratings (KN)		Mass (kg)
	d	D	B	rmin	Cr	Cor	
51200	10	26	11	0.6	12.7	17.1	0.030
51201	12	28	11	0.6	13.2	19	0.034
51202	15	32	12	0.6	16.6	24.8	0.046
51203	17	35	12	0.6	17.2	27.3	0.054
51204	20	40	14	0.6	22.3	37.5	0.081
51205	25	47	15	0.6	27.8	50.5	0.111
51206	30	52	16	0.6	29.3	58	0.139
51207	35	62	18	1	39	78	0.215
51208	40	68	19	1	47	98.5	0.276
51209	45	73	20	1	48	105	0.317
51210	50	78	22	1	48.5	111	0.378
51211	55	90	25	1	69.5	159	0.608
51212	60	95	26	1	73.5	179	0.676
51213	65	100	27	1	75	189	0.767
51214	70	105	27	1	76	199	0.793
51215	75	110	27	1	77.5	209	0.874
51216	80	115	28	1	78.5	218	0.916
51217	85	125	31	1	95.5	261	1.25
51218	90	135	35	1.1	117	325	1.70
51220	100	150	38	1.1	147	410	2.29
51222	110	160	38	1.1	153	450	2.46
51224	120	170	39	1.1	154	470	2.71
51226	130	190	45	1.5	191	565	4.22
51228	140	200	46	1.5	193	595	4.77
51230	150	215	50	1.5	220	685	5.87
51232	160	225	51	1.5	223	720	6.32
51234	170	240	55	1.5	261	835	7.81
51236	180	250	56	1.5	266	875	8.34
51238	190	270	62	2	310	1060	11.3
51305	25	52	18	1	35.5	61.5	0.176
51306	30	60	21	1	43	78.5	0.269
51307	35	68	24	1	55.5	105	0.383
51308	40	78	26	1	69	135	0.548
51309	45	85	28	1	80	163	0.684
51310	50	95	31	1.1	96.5	202	0.951
51311	55	105	35	1.1	119	246	1.29
51312	60	110	35	1.1	123	267	1.37
51313	65	115	36	1.1	128	287	1.51
51314	70	125	40	1.1	148	340	2.01
51315	75	135	44	1.5	171	395	2.61
51316	80	140	44	1.5	176	425	2.72
51317	85	150	49	1.5	201	490	3.52
51318	90	155	50	1.5	198	490	3.74
51320	100	170	55	1.5	237	595	4.88
51322	110	190	63	2	267	705	7.67
51324	120	210	70	2.1	296	805	10.8
51326	130	225	75	2.1	330	960	12.7
51328	140	240	80	2.1	350	1050	15.3
51330	150	250	80	2.1	360	1130	16.1

Tapped Roller Bearings

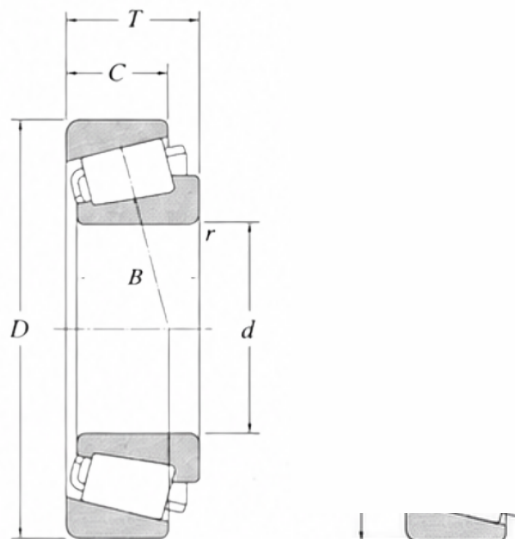

Bearing numbers	Boundary dimensions (mm)						Basic load ratings (kN)		Mass (kg)
	d	D	T	B	C	rmin	Cr	Cor	
30203	17	40	13.25	12	11	1	20.5	20.3	0.080
30204	20	47	15.25	14	12	1	28.2	28.7	0.127
30205	25	52	16.25	15	13	1	31.5	34	0.154
30206	30	62	17.25	16	14	1	43.5	48	0.241
30207	35	72	18.25	17	15	1.5	55.5	61.5	0.341
30208	40	80	19.75	18	16	1.5	61	67	0.435
30209	45	85	20.75	19	16	1.5	67.5	78.5	0.495
30210	50	90	21.75	20	17	1.5	77	93	0.563
30211	55	100	22.75	21	18	2	93	111	0.740
30212	60	110	23.75	22	19	2	105	125	0.949
30213	65	120	24.75	23	20	2	123	148	1.180
30214	70	125	26.25	24	21	2	131	162	1.260
30215	75	130	27.25	25	22	2	139	175	1.410
30216	80	140	28.25	26	22	2.5	160	200	1.720
30217	85	150	30.5	28	24	2.5	183	232	2.140
30218	90	160	32.5	30	26	2.5	208	267	2.660
30219	95	170	34.5	32	27	3	226	290	3.070
30220	100	180	37	34	29	3	258	335	3.780
30221	105	190	39	36	30	3	287	380	4.390
30222	110	200	41	38	32	3	325	435	5.180
30224	120	215	43.5	40	34	3	345	470	6.230
30226	130	230	43.75	40	34	4	375	505	7.250
30303	17	47	15.25	14	12	1	28.9	26.3	0.134
30304	20	52	16.25	15	13	1.5	35.5	34	0.160
30305	25	62	18.25	17	15	1.5	48.5	47.5	0.272
30306	30	72	20.75	19	16	1.5	60	61	0.408
30307	35	80	22.75	21	18	2	75	77	0.540
30308	40	90	25.25	23	20	2	91.5	102	0.769
30309	45	100	27.25	25	22	2	111	126	1.010
30310	50	110	29.25	27	23	2.5	133	152	1.310
30311	55	120	31.5	29	25	2.5	155	179	1.660
30312	60	130	33.5	31	22	3	180	210	2.060
30313	65	140	36	33	28	3	203	238	2.550
30314	70	150	38	35	30	3	230	272	3.060
30315	75	160	40	37	31	3	255	305	3.570
30316	80	170	42.5	39	33	3	291	350	4.410
30317	85	180	44.5	41	34	4	305	365	5.200
30318	90	190	46.5	43	36	4	335	405	6.030
30319	95	200	49.5	45	38	4	365	445	6.980